| | | DEPARTMENT | ATE OF UTAH OF NATURAL RI F OIL, GAS AND | | | | FOI AMENDED REPO | RM 3 | |
|--|-------------------|---|---|--------------|----------|---|--------------------------------|--------------|--|
| APPLI | CATION FOR F | PERMIT TO DRILL | | | | 1. WELL NAME and Greater | NUMBER Monument Butte S- | 1-9-16 | |
| 2. TYPE OF WORK DRILL NEW WELL (iii) | REENTER P&A | WELL DEEPER | N WELL | | | 3. FIELD OR WILD | CAT MONUMENT BUTTE | | |
| 4. TYPE OF WELL Oil We | ell Coalbec | d Methane Well: NO | | | | 5. UNIT or COMMU | JNITIZATION AGRI | EEMENT NAME | |
| 6. NAME OF OPERATOR | WFIELD PRODUCT | | | | | 7. OPERATOR PHO | | | |
| 8. ADDRESS OF OPERATOR | | | | | | 9. OPERATOR E-M | | m | |
| 10. MINERAL LEASE NUMBER | t 3 Box 3630 , My | 11. MINERAL OWNE | RSHIP | | | 12. SURFACE OWN | | 11 | |
| (FEDERAL, INDIAN, OR STATE) UTU-52013 | | FEDERAL (IND | IAN 🔵 STATE | FEE (| = | | IDIAN 🔵 STATE | | |
| 13. NAME OF SURFACE OWNER (if box 12 | = 'fee') | | | | | 14. SURFACE OWN | IER PHONE (if box | 12 = 'fee') | |
| 15. ADDRESS OF SURFACE OWNER (if box | 12 = 'fee') | | | | | 16. SURFACE OWN | IER E-MAIL (if box | 12 = 'fee') | |
| 17. INDIAN ALLOTTEE OR TRIBE NAME (if box 12 = 'INDIAN') | | 18. INTEND TO COM MULTIPLE FORMATION YES (Submit Co | | | _ | 19. SLANT VERTICAL DI | RECTIONAL 📵 🛚 F | HORIZONTAL (| |
| 20. LOCATION OF WELL | FOO | TAGES | QTR-QTR | SECT | ION | TOWNSHIP | RANGE | MERIDIAN | |
| LOCATION AT SURFACE | 1964 FSL | _ 1942 FEL | NWSE | 1 | | 9.0 S | 16.0 E | S | |
| Top of Uppermost Producing Zone | NWSE | 1 | | 9.0 S | 16.0 E | S | | | |
| At Total Depth | 999 FSL | 1028 FEL | SESE | 1 | | 9.0 S | 16.0 E | S | |
| 21. COUNTY DUCHESNE | | 22. DISTANCE TO NE | EAREST LEASE L | NE (Feet) | | 23. NUMBER OF A | CRES IN DRILLING | UNIT | |
| | | 25. DISTANCE TO NE (Applied For Drilling | | SAME POOL | L | 26. PROPOSED DE | PTH D: 6341 TVD: 634 | 1 | |
| 27. ELEVATION - GROUND LEVEL | | 28. BOND NUMBER | | | | 29. SOURCE OF DRILLING WATER / | | | |
| 5424 | | | WYB000493 | | | WATER RIGHTS APPROVAL NUMBER IF APPLICABLE 437478 | | | |
| | | АТ | TACHMENTS | | | | | | |
| VERIFY THE FOLLOWING | ARE ATTACHE | D IN ACCORDANG | CE WITH THE | UTAH OIL | AND (| GAS CONSERVAT | ION GENERAL R | ULES | |
| WELL PLAT OR MAP PREPARED BY | LICENSED SURV | EYOR OR ENGINEER | co | MPLETE DR | ILLING | i PLAN | | | |
| AFFIDAVIT OF STATUS OF SURFACE | OWNER AGREE | MENT (IF FEE SURF | ACE) FO | RM 5. IF OPI | ERATO | R IS OTHER THAN 1 | THE LEASE OWNER | | |
| DIRECTIONAL SURVEY PLAN (IF DI | RECTIONALLY O | R HORIZONTALLY | г то | POGRAPHIC | AL MAI | P | | | |
| NAME Mandie Crozier | | TITLE Regulatory T | ech | | PHOI | NE 435 646-4825 | | | |
| SIGNATURE | | DATE 12/08/2010 | | | EMAI | (L mcrozier@newfield | I.com | | |
| API NUMBER ASSIGNED 43013505370000 | | APPROVAL | | | B | acqill | ş | | |
| | | | | | Po | ermit Manager | | | |

API Well No: 43013505370000 Received: 12/8/2010

| | Proposed Hole, Casing, and Cement | | | | | | | | |
|--------|-----------------------------------|-------------|----------|-------------|--|--|--|--|--|
| String | Hole Size | Casing Size | Top (MD) | Bottom (MD) | | | | | |
| Prod | 7.875 | 5.5 | 0 | 6341 | | | | | |
| Pipe | Grade | Length | Weight | | | | | | |
| | Grade J-55 LT&C | 6341 | 15.5 | | | | | | |
| | | | | | | | | | |

API Well No: 43013505370000 Received: 12/8/2010

| | Proposed Hole, Casing, and Cement | | | | | | | | |
|--------|-----------------------------------|-------------|----------|-------------|---|--|--|--|--|
| String | Hole Size | Casing Size | Top (MD) | Bottom (MD) | | | | | |
| Surf | 12.25 | 8.625 | 0 | 300 | | | | | |
| Pipe | Grade | Length | Weight | | | | | | |
| | Grade J-55 ST&C | 300 | 24.0 | | П | | | | |
| | | | | | | | | | |

NEWFIELD PRODUCTION COMPANY GREATER MONUMENT BUTTE S-1-9-16 AT SURFACE: NW/SE SECTION 1, T9S, R16E DUCHESNE COUNTY, UTAH

TEN POINT DRILLING PROGRAM

1. GEOLOGIC SURFACE FORMATION:

Uinta formation of Upper Eocene Age

2. <u>ESTIMATED TOPS OF IMPORTANT GEOLOGIC MARKERS:</u>

| Uinta | 0' - | 1510' |
|-------------|------|-------|
| Green River | | 1510' |
| Wasatch | | 6125' |
| Proposed TD | | 6341' |

3. ESTIMATED DEPTHS OF ANTICIPATED WATER, OIL, GAS OR MINERALS:

Green River Formation (Oil) 1510' – 6125'

Fresh water may be encountered in the Uinta Formation, but would not be expected below about 350'. All water shows and water bearing geologic units shall be reported to the geologic and engineering staff of the Vernal Office prior to running the next string of casing or before plugging orders are requested. All water shows must be reported within one (1) business day after being encountered.

All usable (<10,000 PPM TDS) water and prospectively valuable minerals (as described by BLM at onsite) encountered during drilling will be recorded by depth and adequately protected. This information shall be reported to the Vernal Office.

Detected water flows shall be sampled, analyzed, and reported to the geologic & engineering staff of the Vernal Office. The office may request additional water samples for further analysis. Usage of the State of Utah form *Report of Water Encountered* is acceptable, but not required.

The following information is requested for water shows and samples where applicable:

Location & Sampled Interval

Flow Rate

Hardness

Water Classification (State of Utah)

Date Sampled

Temperature

pH

Dissolved Calcium (Ca) (mg/l)

Dissolved Iron (Fe) (ug/l)

Dissolved Magnesium (Mg) (mg/l)

Dissolved Bicarbonate (NaHCO₃) (mg/l)

Dissolved Sulfate (SO₄) (mg/l)

Dissolved Total Solids (TDS) (mg/l)

4. PROPOSED CASING PROGRAM

a. Casing Design: Greater Monument Butte S-1-9-16

| Size | Interval | | Weight | Grade | Coupling | Design Factors | | | |
|----------------|----------|--------|---------|-------|----------|----------------|----------|---------|--|
| | Тор | Bottom | vveignt | Grade | Couping | Burst | Collapse | Tension | |
| Surface casing | 0' | 2001 | 24.0 | J-55 | STC | 2,950 | 1,370 | 244,000 | |
| 8-5/8" | 0 | 300' | 24.0 | 3-55 | 310 | 17.53 | 14.35 | 33.89 | |
| Prod casing | 0' | C 2441 | 15.5 | | 1.70 | 4,810 | 4,040 | 217,000 | |
| 5-1/2" | 0 | 6,341' | 15.5 | J-55 | LTC | 2.38 | 2,00 | 2.21 | |

Assumptions:

- 1) Surface casing max anticipated surface press (MASP) = Frac gradient gas gradient
- 2) Prod casing MASP (production mode) = Pore pressure gas gradient
- 3) All collapse calculations assume fully evacuated casing w/ gas gradient
- 4) All tension calculations assume air weight

Frac gradient at surface casing shoe = 13.0 ppg
Pore pressure at surface casing shoe = 8.33 ppg
Pore pressure at prod casing shoe = 8.33 ppg
Gas gradient = 0.115 psi/ft

All casing shall be new or, if used, inspected and tested. Used casing shall meet or exceed API standards for new casing.

All casing strings shall have a minimum of 1 (one) centralizer on each of the bottom three (3) joints.

b. Cementing Design: Greater Monument Butte S-1-9-16

| Job | Fill | Description | Sacks | ОН | Weight | Yield | |
|----------------|--------|------------------------------|-----------------|---------|--------|----------|--|
| 300 | L.M. | Description | ft ³ | Excess* | (ppg) | (ft³/sk) | |
| Surface casing | 300' | Class G w/ 2% CaCl | 138 | 30% | 15.8 | 1.17 | |
| Surface casing | 300 | Class G W/ 2/6 CaCl | 161 | 30 70 | 15.0 | 517 | |
| Prod casing | 4,341' | Prem Lite II w/ 10% gel + 3% | 300 | 30% | 11.0 | 3.26 | |
| Lead | 4,341 | KCI | 978 | 30 /0 | 11.0 | 5.20 | |
| Prod casing | 2.000' | 50/50 Poz w/ 2% gel + 3% | 363 | 30% | 14.3 | 1.24 | |
| Tail | 2,000 | KCI | 451 | 30 /4 | 114.5 | 1.27 | |

- *Actual volume pumped will be 15% over the caliper log
- Compressive strength of lead cement: 1800 psi @ 24 hours, 2250 psi @ 72 hours
- Compressive strength of tail cement: 2500 psi @ 24 hours

Hole Sizes: A 12-1/4" hole will be drilled for the 8-5/8" surface casing. A 7-7/8" hole will be drilled for the 5-1/2" production casing.

The 8-5/8" surface casing shall in all cases be cemented back to surface. In the event that during the primary surface cementing operation the cement does not circulate to surface, or if the cement level should fall back more than 8 feet from surface, then a remedial surface cementing operation shall be performed to insure adequate isolation and stabilization of the surface casing.

5. MINIMUM SPECIFICATIONS FOR PRESSURE CONTROL:

The operator's minimum specifications for pressure control equipment are as follows:

An 8" Double Ram Hydraulic unit with a closing unit will be utilized. Function test of BOP's will be check daily.

Refer to Exhibit C for a diagram of BOP equipment that will be used on this well.

6. TYPE AND CHARACTERISTICS OF THE PROPOSED CIRCULATION MUDS:

From surface to ± 350 feet will be drilled with an air/mist system. The air rig is equipped with a 6 ½" blooie line that is straight run and securely anchored. The blooie line is used with a discharge less than 100 ft from the wellbore in order to minimize the well pad size. The blooie line is not equipped with an automatic igniter or continuous pilot light and the compressor is located less than 100 ft from the well bore due to the low possibility of combustion with the air dust mixture. The trailer mounted compressor (capacity of 2000 CFM) has a safety shut-off valve which is located 15 feet from the air rig. A truck with 70 bbls of water is on stand by to be used as kill fluid, if necessary. From about ± 350 feet to TD, a fresh water system will be utilized. Clay inhibition and hole stability will be achieved with a KCl substitute additive. This additive will be identified in the APD and reviewed to determine if the reserve pit shall be lined. This fresh water system will typically contain Total Dissolved Solids (TDS) of less than 3000 PPM. Anticipated mud weight is 8.4 lbs/gal. If necessary to control formation fluids or pressure, the system will be weighted with the addition of bentonite gel, and if pressure conditions warrant, with barite

No chromate additives will be used in the mud system on Federal and/or Indian lands without prior BLM approval to ensure adequate protection of fresh aquifers.

No chemicals subject to reporting under SARA Title III in an amount equal to or greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling, testing, or completing of this well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported, or disposed of in association with the drilling, testing, or completing of this well.

Hazardous substances specifically listed by the EPA as a hazardous waste or demonstrating a characteristic of a hazardous waste will not be used in drilling, testing, or completion operations.

Newfield Production will **visually** monitor pit levels and flow from the well during drilling operations.

7. AUXILIARY SAFETY EQUIPMENT TO BE USED:

Auxiliary safety equipment will be a Kelly Cock, bit float, and a TIW valve with drill pipe threads.

8. TESTING, LOGGING AND CORING PROGRAMS:

The logging program will consist of a Dual Induction, Gamma Ray and Caliper log from TD to base of surface casing @ 300' +/-, and a Compensated Neutron-Formation Density Log from TD to 3500' +-. A cement bond log will be run from PBTD to cement top. No drill stem testing or coring is planned for this well.

9. ANTICIPATED ABNORMAL PRESSURE OR TEMPERATURE:

No abnormal temperatures or pressures are anticipated. No hydrogen sulfide has been encountered or is known to exist from previous drilling in the area at this depth. Maximum anticipated bottomhole pressure will approximately equal total depth in feet multiplied by a 0.433 psi/foot gradient.

10. ANTICIPATED STARTING DATE AND DURATION OF THE OPERATIONS:

It is anticipated that the drilling operations will commence the first quarter of 2011, and take approximately seven (7) days from spud to rig release.

T9S, R16E, S.L.B.&M. S89'57'E (G.L.O.) N89°13'51"E - 2642.67' (Meas.) N89'11'00"E - 2642.79' (Meas.) 1910 Brass Brass Cap 1910 Bross Cap Сар (Meas.) LOT 1 LOT 4 LOT 3 LOT 2 10, 2634. WELL LOCATION: 'n 5-1-9-16 (G.L.O.) (G.L.O.) 200.25 ELEV. EXIST. GRADED GROUND = 5424 1910 80.06 Brass Cap DRILLING 1990 WNDOW Aluminum NORTH S0.06'E (Meas.) Cap 1942' Center of 16 Top or Pattern 2663. Hole 1275 301.05'18"E 1028 **Bottom** V00°53 on of Hole 1910 1910 1910 Brass Cop Brass Cop Brass Cap S89'07'24"W - 2633.02' (Meas.) 589'06'48"W - 2642.81' (Meas.) N89°58'W - 79.92 (G.L.O.) = SECTION CORNERS LOCATED S-1-9-16 BASIS OF ELEV; Elevations are base on (Surface Location) NAD 83 LOCATION: an N.G.S. OPUS Correction. $LATITUDE = 40^{\circ} 03' 28.74"$ LAT. 40°04'09.56" LONG. 110°00'43.28" LONGITUDE = 110° 03' 55.02" (Tristate Aluminum Cap) Elev. 5281.57'

NEWFIELD EXPLORATION COMPANY

WELL LOCATION, S-1-9-16, LOCATED AS SHOWN IN THE NW 1/4 SE 1/4 OF SECTION 1, T9S, R16E, S.L.B.&M. DUCHESNE COUNTY, UTAH.


TARGET BOTTOM HOLE, S-1-9-16, LOCATED AS SHOWN IN THE SE 1/4 SE 1/4 OF SECTION 1, T9S, R16E, S.L.B.&M. DUCHESNE COUNTY, UTAH.



NOTES:

- 1. Well footages are measured at right angles to the Section Lines.
- 2. Bearings are based on Global Positioning Satellite observations.


THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD OF ACTUME SURVEYS MADE BY ME OR UNDER ANY SUPPRESSION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE WAS BELLED. 189377




TRI STATE LAND SURVEYING & CONSULTING

180 NORTH VERNAL AVE. - VERNAL, UTAH 84078 (435) 781-2501


| DATE SURVEYED: 06-11-10 | SURVEYED BY: C.M. |
|-----------------------------|-------------------|
| DATE DRAWN: 06-15-10 | DRAWN BY: M.W. |
| REVISED: 10-14-10 - M.W. | SCALE: 1" = 1000' |

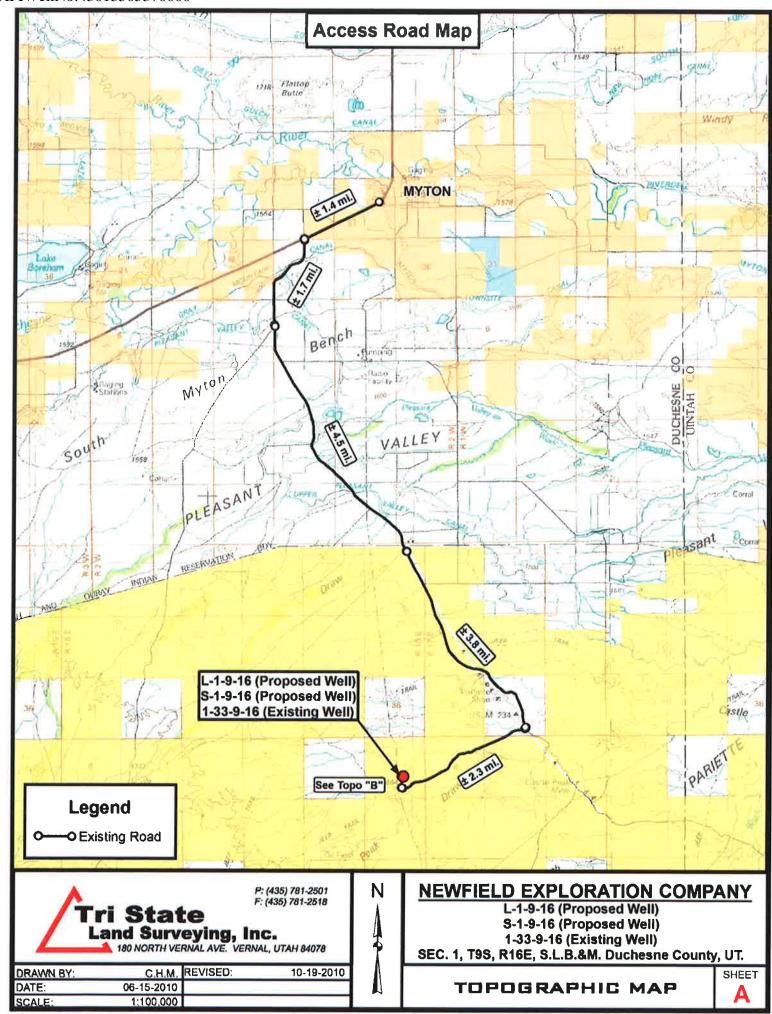

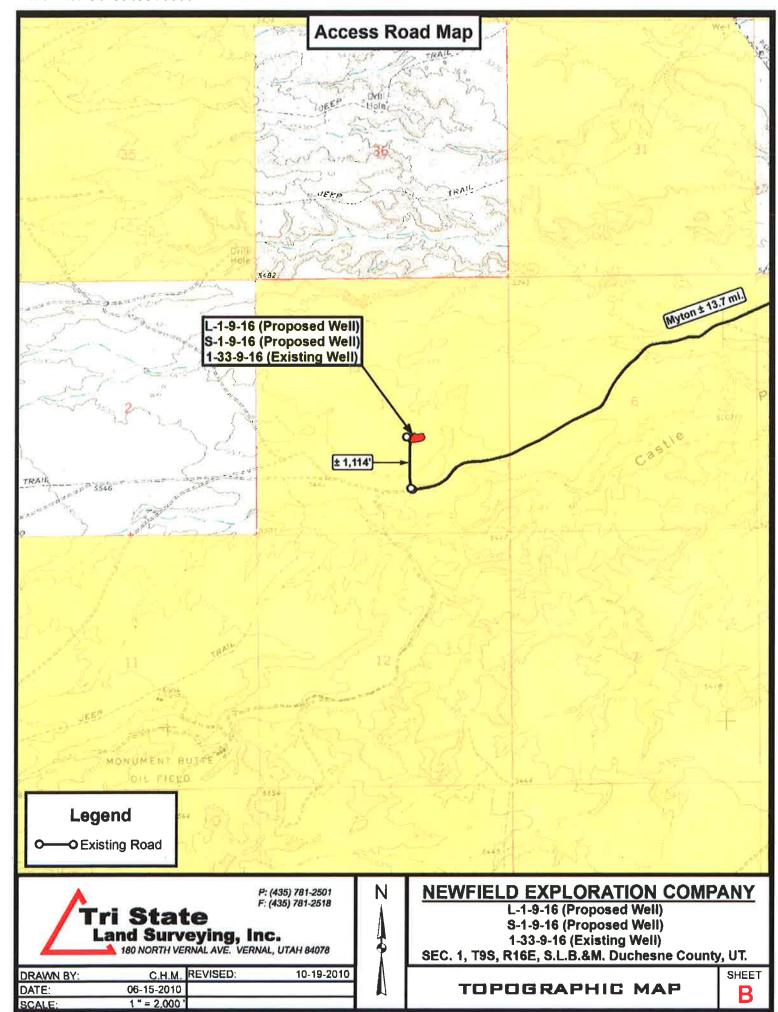


SCALE:

1 " = 2,000"

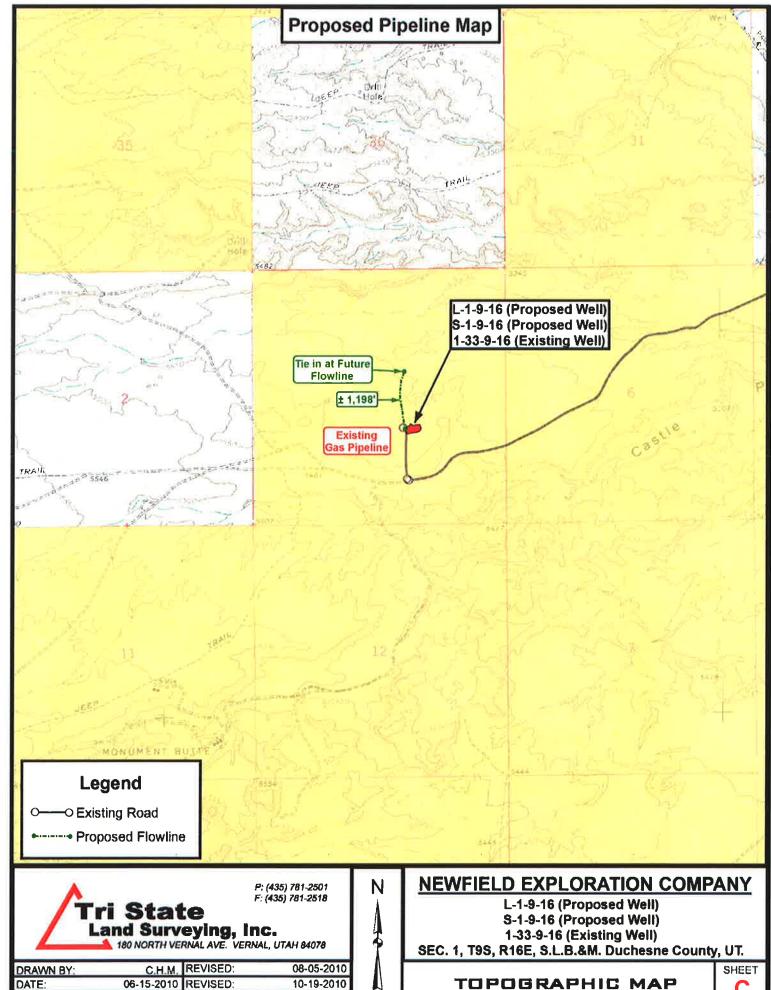

| 'APIWellNo:430135053 | 70000' | | | - | | 7 12 | | 7 2 | T F | 1 1 | | 34 | | 0 1 |
|----------------------|---|---|---|--|--|---|----------------------------|----------------------|------------------|---|---|---------|-----------------|-------------------|
| | | £ | P - | | R | - 2 | | 1 . | | z. | 2 | | .+ | |
| | | Proclecing On Well Proclecing Gas Well Water Injection Well Dry Hole | Physper & Abendoned Shist in Wahir Seiting Weil | Sugar Sugar | # | +1 | -1/- | | | 1 | , , | | 9 | ł |
| | Menuficial Wells Location Surface Sprof Odfling | Proclecing Oil Viel I Proclecing Gas Well Water Injection Weil Dry Hole | Moged & Abend Shie In Shier Seurce We Water Disposal V | Injection Stations Sulfines | | +1 | 2/ - | | •3 ² | F | £ | В | REKYN MOUNTAINS | Exhibit A |
| | Location Surbes Dates | Producting | | | ÷ | 1 . 1 | <u> </u> | +1 | | | | | E N | B. |
| | \$ - 1. | | + • • • | X 3 | +1 | | ast Preselte | *i*- \ | 2 | * | R | a l | Z | 2 3 |
| | - 2 | £ | 2 | n | # | | Jan . | - 1 | - | | | | | 8 |
| | | | - | _ | | 1 | > | 2 | • | 2 4 | 100 | z | - | |
| | . 4 | ī | п | * | 18 | 4 114 | ej ej ej ej ej | 1 | | 3 | - | | _ | - |
| | | _ | - | | - / | A 2 | 1 00 0 1 00 0 1 000 | 4 = | · +1 | *2 B | 2 | R | * | Ξ. |
| | n 2 | | | | z 1/2 | 2 4 | ग्रंब स्टब्स् | | - | 19 | | | | 13 E. 2 |
| | | 9 | | - | -/ | 2 V | 400 | N | 2 | п | 4 | x | * | 100 |
| | + + | 2 2 | | £ | 100 | • 3 | 134274 | स्य को स्य | ન ન | 7 | t. — | <u></u> | | 100 |
| - | | - | - | | 188-1 | 9 4 4 4 4 4 4 4 1 4 4 4 1 4 4 4 | a with 15 to | का का का कि | 1 1 | £ . | of the second | a | * | |
| | | 0 | 2 | a / | | ्रित्तं न्ह पुरुष्यं स् | 1 62 736 | 2 4 4 4 4 4 | +1 | | 40-2 | | | |
| 11- | | - | | -/- | | · · · · · · · · · · · · · · · · · · · | 1 45 4.7 4 | ્યાન લે ક જિલ્લો | et L | | \$ | R | (*) | G |
| | (a) | 2 | | 1 1 B | +1 -1 - | वर्ग नन की विज्ञास वेज्ञास | 4 4 74 | 0000 | 10 0 | | 2 -3 | | | |
| lt- | _ | - | É | 15 10 15 1 15 10 15 1 15 15 15 1 | 41 41 42 42 42 42 42 42 42 42 42 42 42 42 42 | | त्र नामा स् राज्य स् | 0000 | 4 4 4 42 | વેલવું. કાર્યન | E . | 5 | | (8) |
| | - 2 | \$ | z 4 | 12 m 13 14 | CONT. | A LANGE | 3 | 45.00 | | - | ¥ | 1 | | 2 |
| - | | 1 | | R | | | d a 4 16 | स्य प्र | of 2.9 | 1 4 de | ž . | £ | 1 5 | |
| | . : | 2 | ***** | 1 | | 1 444 | district the | वित्र वर्ग वर्गात | Managar a tra | - Sy | 2. 2 | R | | |
| | | | | A STATE AND ADDRESS OF THE PARTY OF THE PART | 14 A.1 | 9 00 0 | 1 | tal was at a | | n 0 | 1 | | | |
| | | | ्रव् व्यक्त | 13.7 | ALL STATES | 7174 | 4000 | 4 11 42 | | | 27 | 1 | | |
| | | i | 44 44 | | 27 | 71 14 1 R 4 X 3 | 2 710 | A AF | 1 27 12 | | n) | | | la: |
| | • | = = | A 45 4 | 4 1 | 100 | NAME OF | 10 \10 \ -10 \10 \10 | 40.00 | A 4 4 4. | *.5+5 *** ** ** | } • 3 • 3 • 3 | я | | 1. |
| | | | 4. | 45 of | 47.5 | 19 4 4 4 | . P. 17 | | | | <u> </u> | | | 1- |
| | | | 44. | 10 | 202 45 e | N. W. | 30° 10° | De la constant | 1 | | e e | 8 | | |
| | | 9 | 47.4 | of the | 4/1 | | | | 112 | 9 03 04 04 0 5 04 05 R | 4 | | | - |
| | | | : 4 | 3 34 | 9444 | T.VA | | 1443 | 4 4 4 | 4 44 | 1 1 1 | 5 | | - 1 |
| | | p | 4 4 4 2 4 4 | 1 -5 =2 | 1181 | Min Night | | 2 0 0 1 | 11010 | | 1 -1 2 0/2 | | _ | - |
| | | | z, | 1 | Total Control | | 1110 | 1 | 9.9 | 444 | et n | 8 | | |
| | | 2 | n i | 4 4 4 | | 集集 | | 4 | # 05 of 25 | et 24 d . | 2 - A 9 + 5 | | - | - |
| | | | -5 | 2.2 | | 4 | 2 | 1 | - 13° i | ોનું જુની. તેનું નુન્ | 12 | R | - | * |
| | . 2 | A : | | n | 110 | | 000 | Horale Horale | - X 4 V | वेन विद्रुष्टे । वे क्षेत्रीन | 1 10 | | - | No. |
| | | 12 | | | + + | NEW OF | ું જ જ જ જ જે જે જ જો જ | 3 1 | | 4 44 | 4 = | * | - | 1 |
| | | 10 * | z. | , " | | *** | 00 VI | 777 | 4 4. | ्रेन्ड । चुन् | 4 | 1 | | |
| | _ | - | | ~ · · | # □ F | 70.4 | | म्बर्ग नेक | न् न न न = | 4 4 4 | S S | R | | I. |
| | | 1 | ٤ | E 103 | - Long | 85 4 5 V | 1 | 4 4 4 | न न न न - | 4 44. | 1 | | | 1 |
| _ | | 1- | •} | -1 \(\frac{1}{6.2} \) | 2 | 166 | * 3 | 42 of #34 | u i | 4 4 4 4 | 111 | ĸ | | • |
| | (M) | 2 | | ·18 .4 | 1 | 2 34 4 V | 14,14 | 0.00 | चेत्रीनंश | 1 | 1 | | | |
| . - | _ | - | | \" | 8 | No. | 4. 4.4 | C Re- | 1 | 4 4 | 30 | | ۳ | , |
| * | | D | z | * } | +3 | 1 | V all in | V 3 V 3 | 474 | 340 | 4 4 4 4 | | | |
| - | | 3 | | | , E | 8 1 | to the state of | 13 7 14 | 44.4 | 471.1 | 1 44 4 . | * | | F. |
| 1 | | -R3W | B | z | H K | ** N (O | V4 V4 | 4 Vid. | 444 | 333 | | R | | 14.4 |
| - | | 1 25 | | 10.00 | | 60 | 110 | પાન પાન ન માન | 424 | 446 4 | 4 9 9 9 | | 3 | * |
| | n 2 | , j- | n | | 8 | CONTRACTOR OF THE PROPERTY OF | 9 | चन्यून | 201 | 100000000000000000000000000000000000000 | # 1 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 | | 1 | |
| | | | | R | 8 | | | | 200 | 1397 | | | 8 | |
| | | | | | | | | | | | | | _ | The second second |

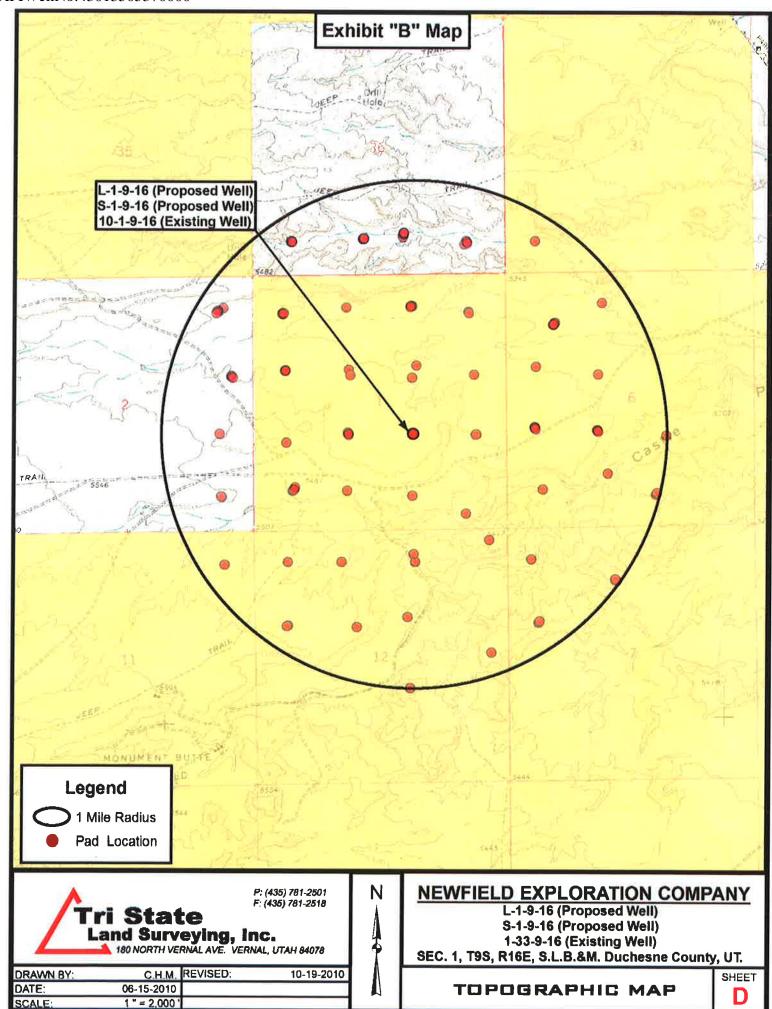



NEWFIELD EXPLORATION

USGS Myton SW (UT) SECTION 1 T 9S, R16E S-1-9-16

Wellbore #1

Plan: Design #1

Standard Planning Report

12 October, 2010





PayZone Directional Services, LLC.

Planning Report



Database: Company: Project: Site:

Well:

Wellbore:

Design:

EDM 2003.21 Single User Db NEWFIELD EXPLORATION USGS Myton SW (UT) SECTION 1 T 9S, R16E

S-1-9-16 Wellbore #1 Design #1

Local Co-ordinate Reference:

TVD Reference: **MD Reference:** North Reference:

Survey Calculation Method:

Well S-1-9-16

S-1-9-16 @ 5436.0ft (Original Well Elev) S-1-9-16 @ 5436.0ft (Original Well Elev)

True

Minimum Curvature

Project USGS Myton SW (UT), DUCHESNE COUNTY, UT, USA

Map System: Geo Datum:

US State Plane 1983 North American Datum 1983

System Datum:

Mean Sea Level

Map Zone:

Utah Central Zone

SECTION 1 T 9S, R16E Site

Site Position: From: **Position Uncertainty:**

Lat/Long

Northing: Easting: Slot Radius: 7,199,000.00 ft 2,041,000,00 ft

Latitude: Longitude: **Grid Convergence:**

40° 4' 27,544 N 110° 4' 6.352 W 0.92°

Well S-1-9-16, SHL LAT: 40° 03' 28.74, LONG: -110° 03' 55.02

0,0 ft

Well Position +N/-S

-5,950.0 ft +E/-W 880,9 ft

Northing: Easting:

7,193,064.93 ft 2,041,976,20 ft Latitude: Longitude:

40° 3' 28.740 N 110° 3' 55.020 W

Position Uncertainty 0,0 ft Wellhead Elevation: 5,436.0 ft **Ground Level:** 5,424,0 ft

| Wellbore | Wellbore #1 | | | | |
|-----------|-------------|-------------|--------------------|------------------|------------------------|
| Magnetics | Model Name | Sample Date | Declination (°) | Dip Angle (°) | Field Strength (nT) |
| | IGRF2010 | 2010/10/12 | 11,40 | 65,82 | 52,344 |

| Design | Design #1 | | | | |
|-------------------|-----------|------------------|-----------|---------------|-----------|
| Audit Notes: | | | | | |
| Version: | | Phase: | PROTOTYPE | Tie On Depth: | 0.0 |
| Vertical Section: | | Depth From (TVD) | +N/-S | +E/-W | Direction |
| | | (ft) | (ft) | (ft) | (°) |
| | | 4,800.0 | 0.0 | 0.0 | 135.64 |

| lan Sections | | | | | | | | | | |
|---------------------------|-----------------|---------|---------------------------|---------------|---------------|-----------------------------|----------------------------|---------------------------|------------|--------------|
| Measured Depth (ft) | Inclination (°) | Azimuth | Vertical Depth (ft) | +N/-S (ft) | +E/-W (ft) | Dogleg Rate (°/100ft) | Build Rate (°/100ft) | Turn Rate (°/100ft) | TFO (°) | Target |
| 0.0 | 0.00 | 0.00 | 0.0 | 0.0 | 0.0 | 0.00 | 0.00 | 0.00 | 0.00 | |
| 600.0 | 0.00 | 0.00 | 600,0 | 0.0 | 0.0 | 0.00 | 0.00 | 0.00 | 0.00 | |
| 1,577.2 | 14.66 | 135.64 | 1,566.6 | -88.9 | 86.9 | 1.50 | 1,50 | 0.00 | 135.64 | |
| 4,919.4 | 14.66 | 135.64 | 4,800.0 | -693.6 | 678.3 | 0.00 | 0.00 | 0.00 | 0.00 | S-1-9-16 TGT |
| 6,340.7 | 14.66 | 135,64 | 6,175.0 | -950.7 | 929.7 | 0.00 | 0.00 | 0.00 | 0.00 | |



PayZone Directional Services, LLC.

Planning Report



Database: Company: Project: Site:

Well:

EDM 2003.21 Single User Db NEWFIELD EXPLORATION USGS Myton SW (UT) SECTION 1 T 9S, R16E

S-1-9-16 Wellbore #1 Wellbore: Design: Design #1

Local Co-ordinate Reference:

TVD Reference: MD Reference: North Reference:

Survey Calculation Method:

Well S-1-9-16

S-1-9-16 @ 5436.0ft (Original Well Elev) S-1-9-16 @ 5436.0ft (Original Well Elev)

True

Minimum Curvature

| lanned Survey | | | | | | | | | |
|---------------------------|--------------------|---------|---------------------------|---------------|---------------|-----------------------------|-----------------------------|----------------------------|---------------------------|
| Measured Depth (ft) | Inclination (°) | Azimuth | Vertical Depth (ft) | +N/-S (ft) | +E/-W (ft) | Vertical Section (ft) | Dogleg Rate (°/100ft) | Build Rate (°/100ft) | Turn Rate (°/100ft) |
| | | | | | | | 0.00 | 0.00 | 0.00 |
| 0.0 | 0.00 | 0.00 | 0.0 | 0.0 | 0.0 | 0.0 | | | 0.00 |
| 100.0 | 0.00 | 0.00 | 100.0 | 0.0 | 0.0 | 0_0 | 0.00 | 0.00 | |
| 200.0 | 0,00 | 0.00 | 200.0 | 0,0 | 0.0 | 0.0 | 0.00 | 0.00 | 0.00 |
| 300.0 | 0.00 | 0,00 | 300.0 | 0.0 | 0.0 | 0.0 | 0.00 | 0,00 | 0.00 |
| 400.0 | 0.00 | 0.00 | 400.0 | 0.0 | 0.0 | 0.0 | 0.00 | 0.00 | 0.00 |
| 500.0 | 0.00 | 0.00 | 500.0 | 0.0 | 0.0 | 0.0 | 0.00 | 0.00 | 0.00 |
| 600.0 | 0.00 | 0.00 | 600.0 | 0.0 | 0.0 | 0.0 | 0.00 | 0.00 | 0.00 |
| | | | | | | | | | |
| 700.0 | 1.50 | 135,64 | 700.0 | -0.9 | 0.9 | 1,3 | 1.50 | 1.50 | 0,00 |
| 0,008 | 3.00 | 135.64 | 799.9 | -3.7 | 3.7 | 5.2 | 1.50 | 1.50 | 0.00 |
| 900.0 | 4.50 | 135,64 | 899.7 | -8.4 | 8.2 | 11.8 | 1.50 | 1.50 | 0.00 |
| 1,000.0 | 6.00 | 135.64 | 999.3 | -15.0 | 14.6 | 20.9 | 1.50 | 1,50 | 0.00 |
| | | | | | | 32.7 | 1.50 | 1.50 | 0.00 |
| 1,100.0 | 7.50 | 135,64 | 1,098.6 | -23.4 | 22.8 | | | | |
| 1,200.0 | 9.00 | 135.64 | 1,197.5 | -33.6 | 32.9 | 47.0 | 1,50 | 1,50 | 0,00 |
| 1,300.0 | 10.50 | 135,64 | 1,296.1 | -45.7 | 44.7 | 64.0 | 1.50 | 1.50 | 0.00 |
| 1,400.0 | 12.00 | 135,64 | 1,394,2 | -59.7 | 58.4 | 83.5 | 1.50 | 1.50 | 0.00 |
| 1,500.0 | 13,50 | 135.64 | 1.491.7 | -75,5 | 73.8 | 105.5 | 1.50 | 1.50 | 0.00 |
| 1,577.2 | 14.66 | 135.64 | 1,566.6 | -88.9 | 86.9 | 124.3 | 1.50 | 1,50 | 0.00 |
| | | | | | | | | | |
| 1,600.0 | 14.66 | 135.64 | 1,588.6 | -93.0 | 91.0 | 130:1 | 0.00 | 0.00 | 0.00 |
| 1,700.0 | 14.66 | 135.64 | 1,685.4 | -111.1 | 108_6 | 155.4 | 0.00 | 0.00 | 0.00 |
| 1,800.0 | 14.66 | 135,64 | 1,782.1 | -129.2 | 126.3 | 180.7 | 0.00 | 0.00 | 0.00 |
| 1,900.0 | 14.66 | 135,64 | 1,878.9 | -147.3 | 144.0 | 206.0 | 0.00 | 0.00 | 0.00 |
| | | | | | | | | 0.00 | 0.00 |
| 2,000.0 | 14.66 | 135,64 | 1,975.6 | -165.4 | 161.7 | 231.3 | 0.00 | | |
| 2,100.0 | 14.66 | 135.64 | 2,072.4 | -183.5 | 179.4 | 256.6 | 0.00 | 0.00 | 0.00 |
| 2,200.0 | 14.66 | 135.64 | 2,169.1 | -201,6 | 197.1 | 281.9 | 0.00 | 0.00 | 0.00 |
| 2,300.0 | 14,66 | 135,64 | 2,265.8 | -219.7 | 214.8 | 307,2 | 0.00 | 0.00 | 0.00 |
| 2,400.0 | 14.66 | 135,64 | 2,362.6 | -237.7 | 232.5 | 332.5 | 0.00 | 0.00 | 0.00 |
| | | | | | | | | | |
| 2,500.0 | 14.66 | 135.64 | 2,459.3 | -255.8 | 250.2 | 357.8 | 0.00 | 0.00 | 0.00 |
| 2,600.0 | 14.66 | 135,64 | 2,556.1 | -273.9 | 267.9 | 383.1 | 0.00 | 0.00 | 0.00 |
| 2,700.0 | 14.66 | 135,64 | 2,652,8 | -292.0 | 285.6 | 408,5 | 0.00 | 0.00 | 0.00 |
| 2,800.0 | 14.66 | 135,64 | 2,749.6 | -310.1 | 303,3 | 433.8 | 0.00 | 0.00 | 0,00 |
| 0.000.0 | 44.00 | 125.64 | 0.040.2 | 200.2 | 204.0 | 450.4 | 0.00 | 0.00 | 0.00 |
| 2,900.0 | 14.66 | 135.64 | 2,846.3 | -328.2 | 321.0 | 459.1 | 0.00 | | |
| 3,000,0 | 14.66 | 135.64 | 2,943,1 | -346.3 | 338.7 | 484.4 | 0.00 | 0.00 | 0.00 |
| 3,100,0 | 14.66 | 135.64 | 3,039,8 | -364.4 | 356.3 | 509.7 | 0.00 | 0.00 | 0.00 |
| 3,200.0 | 14.66 | 135.64 | 3,136.6 | -382,5 | 374.0 | 535.0 | 0.00 | 0.00 | 0,00 |
| 3,300.0 | 14.66 | 135.64 | 3,233.3 | -400.6 | 391.7 | 560.3 | 0.00 | 0.00 | 0.00 |
| | 44.00 | | | 440.7 | 400:4 | 505.0 | 0.00 | 0.00 | 0.00 |
| 3,400.0 | 14.66 | 135.64 | 3,330.0 | -418.7 | 409.4 | 585.6 | 0.00 | 0.00 | 0.00 |
| 3,500.0 | 14.66 | 135.64 | 3,426.8 | -436.8 | 427.1 | 610.9 | 0.00 | 0.00 | 0,00 |
| 3,600.0 | 14.66 | 135.64 | 3,523,5 | -454.9 | 444.8 | 636.2 | 0.00 | 0.00 | 0,00 |
| 3,700.0 | 14.66 | 135.64 | 3,620.3 | -473.0 | 462.5 | 661.5 | 0.00 | 0.00 | 0,00 |
| 3,800.0 | 14.66 | 135,64 | 3,717.0 | -491.0 | 480.2 | 686.8 | 0.00 | 0.00 | 0.00 |
| | | | | | | | | | |
| 3,900.0 | 14.66 | 135.64 | 3,813.8 | -509.1 | 497.9 | 712.1 | 0.00 | 0.00 | 0.00 |
| 4,000.0 | 14,66 | 135.64 | 3,910.5 | -527.2 | 515.6 | 737.4 | 0.00 | 0,00 | 0.00 |
| 4,100.0 | 14.66 | 135,64 | 4,007.3 | -545.3 | 533.3 | 762.7 | 0.00 | 0,00 | 0.00 |
| 4,200.0 | 14.66 | 135,64 | 4,104.0 | -563.4 | 551.0 | 788.0 | 0.00 | 0.00 | 0.00 |
| 4,300.0 | 14.66 | 135.64 | 4,200.8 | -581.5 | 568.7 | 813.3 | 0.00 | 0.00 | 0.00 |
| | | | | | | | | | |
| 4,400.0 | 14.66 | 135,64 | 4,297.5 | -599.6 | 586.4 | 838.6 | 0.00 | 0.00 | 0.00 |
| 4,500.0 | 14,66 | 135.64 | 4,394.2 | -617.7 | 604.0 | 864.0 | 0.00 | 0.00 | 0.00 |
| 4,600.0 | 14.66 | 135.64 | 4,491.0 | -635.8 | 621.7 | 889,3 | 0.00 | 0.00 | 0.00 |
| 4,700.0 | 14.66 | 135.64 | 4,587.7 | -653.9 | 639.4 | 914.6 | 0.00 | 0.00 | 0.00 |
| 4,800.0 | 14.66 | 135.64 | 4,684.5 | -672.0 | 657.1 | 939.9 | 0.00 | 0.00 | 0.00 |
| | | | | | | | | | |
| 4,900.0 | 14,66 | 135.64 | 4,781.2 | -690.1 | 674.8 | 965.2 | 0.00 | 0.00 | 0.00 |
| 4,919.4 | 14.66 | 135.64 | 4,800.0 | -693.6 | 678.3 | 970.1 | 0.00 | 0.00 | 0.00 |
| S-1-9-16 TGT | | | 2 | | | | | | |
| 3-1-3-10 [G] | | | | | | | | | |



PayZone Directional Services, LLC.

Planning Report



Database: Company: Project: Site:

Wellbore:

Design:

Well:

EDM 2003.21 Single User Db NEWFIELD EXPLORATION USGS Myton SW (UT) SECTION 1 T 9S, R16E

S-1-9-16 Wellbore #1 Design #1 Local Co-ordinate Reference:

TVD Reference:
MD Reference:

North Reference: Survey Calculation Method: Well S-1-9-16

S-1-9-16 @ 5436.0ft (Original Well Elev) S-1-9-16 @ 5436.0ft (Original Well Elev)

True

Minimum Curvature

| Measured Depth (ft) | Inclination (°) | Azimuth (°) | Vertical Depth (ft) | +N/-S (ft) | +E/-W (ft) | Vertical Section (ft) | Dogleg Rate (°/100ft) | Build Rate (°/100ft) | Turn Rate (°/100ft) |
|---------------------------|--------------------|----------------|---------------------------|---------------|---------------|-----------------------------|-----------------------------|----------------------------|---------------------------|
| 5.100.0 | 14.66 | 135.64 | 4,974.7 | -726.3 | 710.2 | 1,015.8 | 0.00 | 0.00 | 0.00 |
| 5,200.0 | 14.66 | 135.64 | 5,071.5 | -744.3 | 727.9 | 1,041.1 | 0.00 | 0_00 | 0.00 |
| 5,300.0 | 14.66 | 135.64 | 5,168.2 | -762,4 | 745.6 | 1,066.4 | 0.00 | 0.00 | 0.00 |
| 5,400.0 | 14.66 | 135.64 | 5,264.9 | -780.5 | 763.3 | 1,091.7 | 0.00 | 0.00 | 0.00 |
| 5,500.0 | 14.66 | 135.64 | 5,361.7 | -798.6 | 781.0 | 1,117.0 | 0.00 | 0.00 | 0.00 |
| 5,600.0 | 14.66 | 135.64 | 5,458.4 | -816.7 | 798.7 | 1,142.3 | 0.00 | 0.00 | 0.00 |
| 5,700.0 | 14.66 | 135,64 | 5,555.2 | -834.8 | 816.4 | 1,167.6 | 0.00 | 0.00 | 0.00 |
| 5,800.0 | 14.66 | 135.64 | 5,651.9 | -852.9 | 834.1 | 1,192.9 | 0.00 | 0.00 | 0.00 |
| 5,900.0 | 14.66 | 135.64 | 5,748.7 | -871.0 | 851.7 | 1,218.2 | 0.00 | 0.00 | 0.00 |
| 6,000.0 | 14.66 | 135.64 | 5,845.4 | -889.1 | 869.4 | 1,243.5 | 0.00 | 0.00 | 0.00 |
| 6,100.0 | 14.66 | 135.64 | 5,942.2 | -907.2 | 887.1 | 1,268.8 | 0.00 | 0,00 | 0.00 |
| 6,200.0 | 14,66 | 135.64 | 6,038.9 | -925.3 | 904.8 | 1,294.2 | 0.00 | 0.00 | 0.00 |
| 6,300.0 | 14.66 | 135.64 | 6,135.7 | -943.4 | 922.5 | 1,319.5 | 0.00 | 0.00 | 0.00 |
| 6,340.7 | 14.66 | 135.64 | 6,175.0 | -950.7 | 929.7 | 1,329.8 | 0.00 | 0.00 | 0.00 |

| Targets | | | | | | | | | |
|--|-----------|----------|-------------|---------------|---------------|------------------|-----------------|-----------------|------------------|
| Target Name - hit/miss target - Shape | Dip Angle | Dip Dir. | TVD (ft) | +N/-S (ft) | +E/-W (ft) | Northing (ft) | Easting (ft) | Latitude | Longitude |
| S-1-9-16 TGT - plan hits target - Circle (radius 75.0) | 0,00 | 0.00 | 4,800,0 | -693.6 | 678.3 | 7,192,382.32 | 2,042,665.49 | 40° 3' 21.885 N | 110° 3' 46.297 W |



Project: USGS Myton SW (UT) Site: SECTION 1 T 9S, R16E


Well: S-1-9-16 Wellbore: Wellbore #1 Design: Design #1



Azimuths to True North Magnetic North: 11.40°

Magnetic Field Strength: 52344.4snT Dip Angle: 65.82° Date: 2010/10/12 Model: IGRF2010

KOP @ 600' DOGLEG RATE 1.5 DEG/100 TARGET RADIUS IS 75'

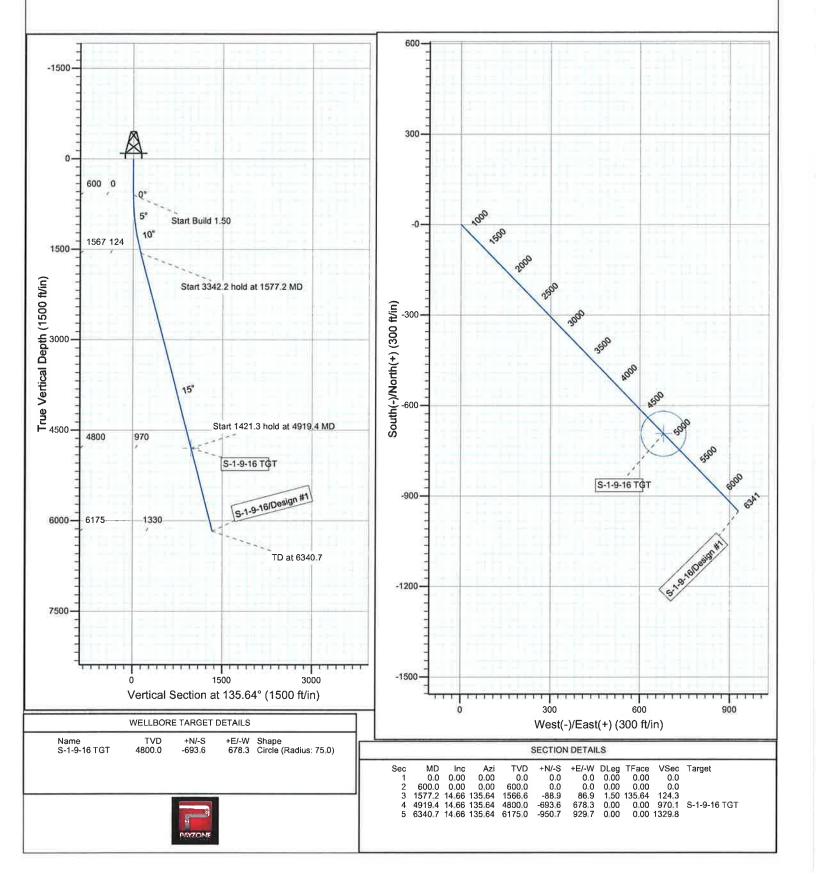

NEWFIELD PRODUCTION COMPANY GREATER MONUMENT BUTTE S-1-9-16 AT SURFACE: NW/SE SECTION 1, T9S, R16E DUCHESNE COUNTY, UTAH

ONSHORE ORDER NO. 1

MULTI-POINT SURFACE USE & OPERATIONS PLAN

1. EXISTING ROADS

See attached Topographic Map "A"

To reach Newfield Production Company well location site Greater Monument Butte S-1-9-16 located in the NW 1/4 SE 1/4 Section 1, T9S, R16E, Duchesne County, Utah:

Proceed southwesterly out of Myton, Utah along Highway 40 - 1.4 miles \pm to the junction of this highway and UT State Hwy 53; proceed southeasterly -10.0 miles \pm to it's junction with an existing road to the southwest; proceed southwesterly -2.3 miles \pm to it's junction with an existing road to the north; proceed northerly -1,114' \pm to the existing 1-33-9-16 well location.

The aforementioned dirt oil field service roads and other roads in the vicinity are constructed out of existing native materials that are prevalent to the existing area they are located in and range from clays to a sandy-clay shale material.

The roads for access during the drilling, completion and production phase will be maintained at the standards required by the State of Utah, or other controlling agencies. This maintenance will consist of some minor grader work for smoothing road surfaces and for snow removal. Any necessary fill material for repair will be purchase and hauled from private sources.

2. PLANNED ACCESS ROAD

There is no proposed access road for this location. The proposed well will be drilled directionaly off of the existing 1-33-9-16 well pad. See attached **Topographic Map "B"**.

There will be **no** culverts required along this access road. There will be barrow ditches and turnouts as needed along this road.

There are no fences encountered along this proposed road. There will be no new gates or cattle guards required.

All construction material for this access road will be borrowed material accumulated during construction of the access road.

3. LOCATION OF EXISTING WELLS

Refer to Exhibit "B".

4. LOCATION OF EXISTING AND/OR PROPOSED FACILITIES

There are no existing facilities that will be used by this well.

It is anticipated that this well will be a producing oil well.

Upon construction of a tank battery, the well pad will be surrounded by a dike of sufficient capacity to contain at minimum 110% of the largest tank volume within the facility battery.

Tank batteries will be built to State specifications.

All permanent (on site for six (6) months or longer) structures, constructed or installed (including pumping units), will be painted a flat, non-reflective, earth tone color to match one of the standard environmental colors, as determined by the Rocky Mountain Five State Interagency Committee. All facilities will be painted within six months of installation.

5. LOCATION AND TYPE OF WATER SUPPLY

Newfield Production will transport water by truck from nearest water source as determined by a Newfield representative for the purpose of drilling the above mentioned well. The available water sources are as follows:

Johnson Water District Water Right: 43-10136

Maurice Harvey Pond Water Right: 47-1358

Neil Moon Pond

Water Right: 43-11787

Newfield Collector Well

Water Right: 41-1817 (A30414DVA, contracted with the Duchesne County Conservancy District).

There will be no water well drilled at this site.

6. SOURCE OF CONSTRUCTION MATERIALS

All construction material for this location shall be borrowed material accumulated during construction of the location site and access road.

A mineral material application is not required for this location.

7. METHODS FOR HANDLING WASTE DISPOSAL

A small reserve pit (90' x 40' x 8' deep, or less) will be constructed from native soil and clay materials. The reserve pit will receive the processed drill cutting (wet sand, shale & rock) removed from the wellbore. Any drilling fluids, which do accumulate in the pit as a result of shale-shaker carryover, cleaning of the sand trap, etc., will be promptly reclaimed. All drilling fluids will be fresh water based, typically containing Total Dissolved Solids of less than 3000 PPM. No potassium chloride, chromates, trash, debris, nor any other substance deemed hazardous will be placed in this pit. Therefore, it is proposed that no synthetic liner be required in the reserve pit. However, if upon constructing the pit there is insufficient fine clay and silt present, a liner will be used for the purpose of reducing water loss through percolation.

Newfield requests approval that a flare pit not be constructed or utilized on this location.

A portable toilet will be provided for human waste.

A trash basket will be provided for garbage (trash) and hauled away to an approved disposal site at the completion of the drilling activities.

8. <u>ANCILLARY FACILITIES</u>

There are no ancillary facilities planned for at the present time and none foreseen in the near future.

9. WELL SITE LAYOUT

See attached Location Layout Sheet.

Fencing Requirements

All pits will be fenced according to the following minimum standards:

- a) A 39-inch net wire shall be used with at least one strand of barbed wire on top of the net.
- b) The net wire shall be no more than two (2) inches above the ground. The barbed wire shall be three (3) inches above the net wire. Total height of the fence shall be at least forty-two (42) inches.
- c) Corner posts shall be centered and/or braced in such a manner to keep tight at all times
- d) Standard steel, wood or pipe posts shall be used between the corner braces. Maximum distance between any two posts shall be no greater than sixteen (16) feet.
- e) All wire shall be stretched, by using a stretching device, before it is attached to the corner posts.

The reserve pit fencing will be on three (3) sides during drilling operations and on the fourth side when the rig moves off location. Pits will be fenced and maintained until cleanup.

Existing fences to be crossed by the access road will be braced and tied off before cutting so as to prevent slacking in the wire. The opening shall be closed temporarily as necessary during construction to prevent the escape of livestock, and upon completion of construction the fence shall be repaired to BLM specifications.

10. PLANS FOR RESTORATION OF SURFACE:

a) Producing Location

Immediately upon well completion, the location and surrounding area will be cleared of all unused tubing, equipment, debris, material, trash and junk not required for production.

The reserve pit and that portion of the location not needed for production facilities/operations will be recontoured to the approximated natural contours. Weather permitting, the reserve pit will be reclaimed within one hundred twenty (120) days from the date of well completion. Before any dirt work takes place, the reserve pit must have all fluids and hydrocarbons removed.

b) Dry Hole Abandoned Location

At such time as the well is plugged and abandoned, the operator shall submit a subsequent report of abandonment and the State of Utah will attach the appropriate surface rehabilitation conditions of approval.

11. SURFACE OWNERSHIP – Bureau of Land Management.

12. OTHER ADDITIONAL INFORMATION

The Archaeological Resource Survey and Paleontological Resource Survey for this area are attached. MOAC Report #10-148, 10/4/10. Paleontological Resource Survey prepared by, Wade E. Miller, 9/17/10. See attached report cover pages, Exhibit "D".

Surface Flow Line

Newfield requests 1,198' of surface flow line be granted. The Surface Flow Line will consist of up to a 14" bundled pipe consisting of 2-2" poly glycol lines and 1-3" production line. For all new wells, Newfield. **Refer to Topographic Map "D"** for the proposed location of the proposed flow line. Flow lines will be tan and will be constructed using the following procedures:

<u>Clearing and Grading</u>: No clearing or grading of the ROW will be required. The centerline of the proposed route will be staked prior to installation. Flow lines shall be placed as close to existing roads as possible without interfering with normal road travel or road maintenance activities. Due to the proximity of existing facilities, no temporary use or construction/storage areas are anticipated. If necessary, temporary use or construction/storage areas will be identified on a topographic map included in the approved permit.

<u>Installation</u>: The proposed flow lines will be installed 4-6" above the ground. For portions along existing two-track and primary access roads, lengths of pipe will be strung out in the borrow ditch, welded together, and rolled or dragged into place with heavy equipment. For pipelines that are installed cross-country (not along existing or proposed roads), travel along the lines will be infrequent and for maintenance needs only. No installation activities will be performed during periods when the soil is too wet to adequately support installation equipment. If such equipment creates ruts in excess of three (3) inches deep, the soil will be deemed too wet to adequately support the equipment.

<u>Termination and Final Reclamation:</u> After abandonment of the associated production facilities, the flow lines will be cut and removed, and any incidental surface disturbance reclaimed. Reclamation procedures will follow those outlined in the Castle Peak and Eight Mile Flat Reclamation and Weed Management Plan.

Water Disposal

After first production, if the production water meets quality guidelines, it will be transported to the Ashley, Monument Butte, Jonah, South Wells Draw and Beluga water injection facilities by company or contract trucks. Subsequently, the produced water is injected into approved Class II wells to enhance Newfield's secondary recovery project. Water not meeting quality criteria, will be disposed at Newfield's Pariette #4 disposal well (Sec. 7, T9S R19E), Federally approved surface disposal facilities or at a State of Utah approved surface disposal facilities.

Additional Surface Stipulations

All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws and regulations, Onshore Oil and Gas Orders, the approved plan of operations and any applicable Notice to Lessees. A copy of these conditions will be furnished to the field representative to ensure compliance.

Details of the On-Site Inspection

The proposed Greater Monument Butte S-1-9-16 was on-sited on 11/9/10. The following were present; Tim Eaton (Newfield Production), Christine Cimiluca (Bureau of Land Management), Suzanne Grayson (Bureau of Land Management), and Janna Simonsen (Bureau of Land Management). Weather conditions were clear and ground cover was 100% open.

Hazardous Material Declaration

Newfield Production Company guarantees that during the drilling and completion of the Greater Monument Butte S-1-9-16, Newfield will not use, produce, store, transport or dispose 10,000# annually of any of the hazardous chemicals contained in the Environmental Protection Agency's consolidated list of chemicals subject to reporting under Title III Superfund Amendments and Reauthorization Act (SARA) of 1986. Newfield also guarantees that during the drilling and completion of the Greater Monument Butte S-1-9-16,

Newfield will use, produce, store, transport or dispose less than the threshold planning quantity (T.P.Q.) of any extremely hazardous substances as defined in 40 CFR 355.

A complete copy of the approved APD, if applicable, shall be on location during the construction of the location and drilling activities.

Newfield Production Company or a contractor employed by Newfield Production shall contact the State office at (801) 722-3417, 48 hours prior to construction activities.

13. LESSEE'S OR OPERATOR'S REPRENSENTATIVE AND CERTIFICATION:

Representative

Name:

Tim Eaton

Address:

Newfield Production Company

Route 3, Box 3630 Myton, UT 84052

Telephone:

(435) 646-3721

Certification

Please be advised that NEWFIELD PRODUCTION COMPANY is considered to be the operator of well #S-1-9-16, Section 1, Township 9S, Range 16E: Lease UTU-52013 Duchesne County, Utah: and is responsible under the terms and conditions of the lease for the operations conducted upon the leased lands. Bond coverage is provided by, Federal Bond #WYB000493.

I hereby certify that the proposed drill site and access route have been inspected, and I am familiar with the conditions which currently exist; that the statements made in this plan are true and correct to the best of my knowledge; and that the work associated with the operations proposed here will be performed by Newfield Production Company and its contractors and subcontractors in conformity with this plan and the terms and conditions under which it is approved. This statement is subject to the provisions of the 18 U.S.C. 1001 for the filing of a false statement.

12/8/10 Date Mandie Crozier Regulatory Specialist

Newfield Production Company

2-M SYSTEM

Blowout Prevention Equipment Systems

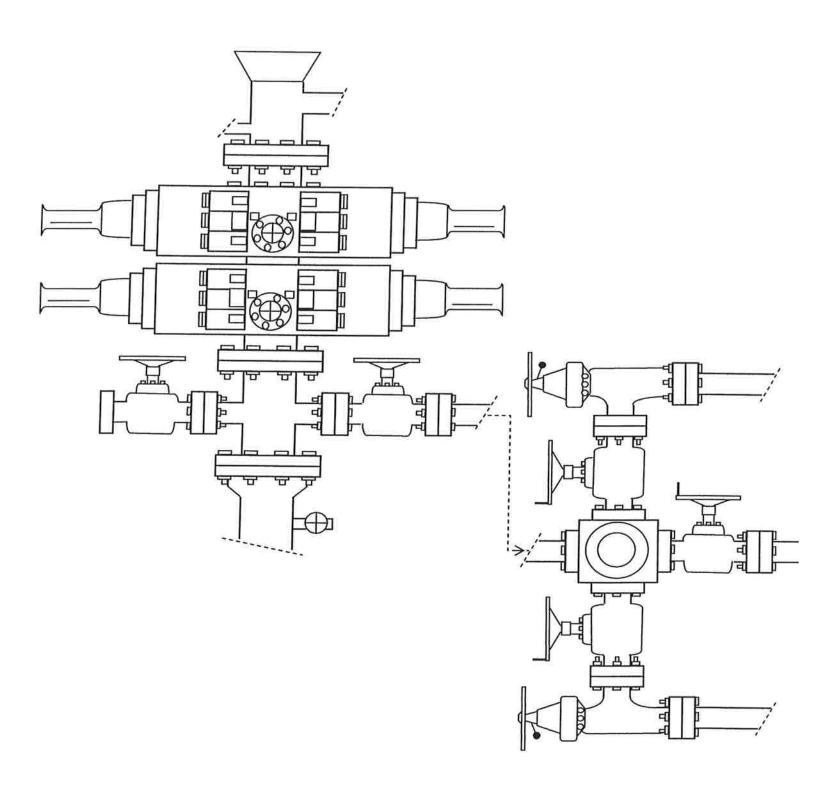


EXHIBIT C

United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Utah State Office P.O. Box 45155 Salt Lake City, Utah 84145-0155

IN REPLY REFER TO: 3160 (UT-922)

December 9, 2010

Memorandum

To: Assistant District Manager Minerals, Vernal District

From: Michael Coulthard, Petroleum Engineer

Subject: 2010 Plan of Development Greater Monument

Butte Unit, Duchesne and Uintah Counties,

Utah.

Pursuant to email between Diana Whitney, Division of Oil, Gas and Mining, and Mickey Coulthard, Utah State Office, Bureau of Land Management, the following wells are planned for calendar year 2010 within the Greater Monument Butte Unit, Duchesne and Uintah Counties, Utah.

BHL Sec 30 T08S R17E 1245 FSL 1200 FWL

API# WELL NAME LOCATION (Proposed PZ GREEN RIVER) 43-013-50528 GMBU M-23-8-17 Sec 23 T08S R17E 1995 FSL 1996 FWL BHL Sec 23 T08S R17E 2236 FNL 2273 FEL 43-013-50529 GMBU R-23-8-17 Sec 23 T08S R17E 1975 FSL 1991 FWL BHL Sec 23 T08S R17E 1164 FSL 2506 FEL 43-013-50530 GMBU N-23-8-17 Sec 23 T08S R17E 1874 FSL 0723 FWL BHL Sec 23 T08S R17E 2606 FNL 1374 FWL 43-013-50531 GMBU Q-23-8-17 Sec 23 T08S R17E 1863 FSL 0704 FWL BHL Sec 23 T08S R17E 1014 FSL 1464 FWL 43-047-51399 GMBU H-24-8-17 Sec 24 T08S R17E 1217 FNL 1933 FWL BHL Sec 24 T08S R17E 0260 FNL 2541 FEL 43-047-51400 GMBU M-24-8-17 Sec 24 T08S R17E 1226 FNL 1912 FWL BHL Sec 24 T08S R17E 2497 FSL 2363 FEL 43-047-51401 GMBU B-25-8-17 Sec 24 T08S R17E 0643 FSL 0674 FEL BHL Sec 25 T08S R17E 0334 FNL 1483 FEL 43-013-50532 GMBU Q-30-8-17 Sec 30 T08S R17E 1978 FSL 1911 FWL API#

WELL NAME

Page 2

(Proposed PZ GREEN RIVER) 43-013-50533 GMBU R-30-8-17 Sec 30 T08S R17E 1996 FSL 1923 FWL BHL Sec 30 T08S R17E 1239 FSL 2393 FEL 43-013-50534 GMBU I-1-9-16 Sec 01 T09S R16E 2136 FNL 1969 FEL BHL Sec 01 T09S R16E 1162 FNL 1294 FEL 43-013-50535 GMBU K-1-9-16 Sec 06 T09S R17E 1988 FNL 0583 FWL BHL Sec 01 T09S R16E 2387 FSL 0291 FEL 43-013-50536 GMBU L-1-9-16 Sec 01 T09S R16E 1973 FSL 1961 FEL BHL Sec 01 T09S R16E 2458 FNL 1122 FEL 43-013-50537 GMBU S-1-9-16 Sec 01 T09S R16E 1964 FSL 1942 FEL BHL Sec 01 T09S R16E 0999 FSL 1028 FEL 43-013-50538 GMBU S-10-9-16 Sec 10 T09S R16E 0598 FSL 1959 FEL BHL Sec 10 T09S R16E 1450 FSL 1170 FEL 43-013-50539 GMBU R-10-9-16 Sec 10 T09S R16E 0644 FSL 2017 FWL BHL Sec 10 T09S R16E 1417 FSL 2500 FEL 43-013-50540 GMBU C-15-9-16 Sec 10 T09S R16E 0624 FSL 2022 FWL BHL Sec 15 T09S R16E 0200 FNL 2508 FEL

LOCATION

This office has no objection to permitting the wells at this time.

Michael L. Coulthard

Digitally signed by Michael L. Coulthard
DN: cn=Michael L. Coulthard, on=Bureau of Land Management, ou=Branch of Minerals,
email=Michael Coulthard@hm.gov, c=US
Date: 2010.12.09 11:11:06-07'00'

bcc: File - Greater Monument Butte Unit
Division of Oil Gas and Mining
Central Files
Agr. Sec. Chron
Fluid Chron

MCoulthard:mc:12-9-10



VIA ELECTRONIC DELIVERY

December 10, 2010

State of Utah, Division of Oil, Gas and Mining ATTN: Diana Mason P.O. Box 145801 Salt Lake City, UT 84114-5801

RE:

Directional Drilling

Greater Monument Butte S-1-9-16
Greater Monument Butte (Green River) Unit

Surface Hole:

T9S-R16E Section 1: NWSE (UTU-52013)

1964' FSL 1942' FEL

At Target:

T9S-R16E Section 1: SESE (UTU-44426)

999' FSL 1028' FEL

Duchesne County, Utah

Dear Ms. Mason;

Pursuant to the filing by Newfield Production Company (NPC) of an Application for Permit to Drill the above referenced well dated 12/8/10, a copy of which is attached, and in accordance with Oil and Gas Conservation Rule R649-3-11, NPC hereby submits this letter as notice of our intention to directionally drill this well.

The surface hole and target locations of this well are both within the boundaries of the Greater Monument Butte Unit (UTU-87538X), of which Newfield certifies that it is the operator. Further, Newfield certifies that all lands within 460 feet of the entire directional well bore are within the Greater Monument Butte Unit.

NPC is permitting this well as a directional well in order to mitigate surface disturbance by utilizing preexiting roads and pipelines.

NPC hereby requests our application for permit to drill be granted pursuant to R649-3-11. If you have any questions or require further information, please contact the undersigned at 303-383-4197 or by email at sgillespie@newfield.com. Your consideration in this matter is greatly appreciated.


Sincerely,


Newfield Production Company


Shane Gillespie Land Associate

(Continued on page 2)

| Form 3160 -3 (August 2007) | FORM APPROVED OMB No. 1004-0137 Expires July 31, 2010 | | | | | | |
|--|---|--|------------------------|---|-------------|-------------------|--|
| UNITED STATES DEPARTMENT OF THE 11 BUREAU OF LAND MANA | 5. Lease Serial No. UTU-52013 | | | | | | |
| APPLICATION FOR PERMIT TO | 6. If Indian, Allotee or Tribe Name NA | | | | | | |
| la. Type of work: ✓ DRILL REENTE | | 7. If Unit or CA Agreement, Name and No. Greater Monument Butte | | | | | |
| Ib. Type of Well: Oil Well Gas Well Other | ✓ | Single Zone Multip | le Zone | Lease Name and Well No. Greater Monument Butte S-1-9-16 | | | |
| 2. Name of Operator Newfield Production Company | | | | 9. API Well No. | | | |
| 3a. Address Route #3 Box 3630, Myton UT 84052 | | No. (Include area cade) 35) 646-3721 | | 10. Field and Pool, or Monument Butt | | гу | |
| 4. Location of Well (Report location clearly and in accordance with any | State requ | irements.*) | | 11. Sec., T. R. M. or B | lk.and Su | rvey or Area | |
| At surface NW/SE 1964' FSL 1942' FEL Sec. 1, T9S I | R16E (| UTU-52013) | | Sec. 1, T9S R1 | 6E | | |
| At proposed prod. zone SE/SE 999' FSL 1028' FEL Sec. 1, | T9S R1 | 6E (UTU-44426) | | | | | |
| 14. Distance in miles and direction from nearest town or post office* Approximately 13.9 miles south of Myton, UT | | | | 12. County or Parish Duchesne | | 13. State UT | |
| 15. Distance from proposed* location to nearest property or lease line, ft. Approx. 292' f/lse, NA' f/unit (Also to nearest drig. unit line, if any) | | of acres in lease 120.00 | 17. Spacin | g Unit dedicated to this v | well | | |
| 18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. Approx. 830' | | oscd Depth 6,341' | | BIA Bond No. on file VYB000493 | | | |
| 21. Elevations (Show whether DF, KDB, RT, GL, etc.) 5424' GL | 22. Appr | pximate date work will star | t*) | 23. Estimated duration (7) days from SPUD to rig release | | | |
| | 24. A | ttachments | | | | | |
| The following, completed in accordance with the requirements of Onshore | e Oil and (| Gas Order No.1, must be at | tached to th | is form: | | | |
| Well plat certified by a registered surveyor. A Drilling Plan. | | Item 20 above). | | ns unless covered by an | existing | bond on file (see | |
| A Surface Use Plan (if the location is on National Forest System I SUPO must be filed with the appropriate Forest Service Office). | Lands, the | 5. Operator certific 6. Such other site s BLM. | ation specific info | ormation and/or plans as | may be | required by the | |
| 25. Signature Capitis Casjos | - 1 | me (Printed-Typed) andie Crozier | | | Date | 8/10 | |
| Title Regulatory Specialist | | | | | | | |
| Approved by (Signature) | Na | nmo (Printed Typed) | Date | | | | |
| Title | Of | fice | | | | | |
| Application approval does not warrant or certify that the applicant holds conduct operations thereon. Conditions of approval, if any, are attached. | legalore | equitable title to those right | s in the sub | ject lease which would | entitle the | applicant to | |
| Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a cri States any false, fictitious or fraudulent statements or representations as to | ime for ar o any matt | ny person knowingly and we ter within its jurisdiction. | villfully to n | nake to any department of | or agency | of the United | |
| (Continued on page 2) | | | | *(lnst | ruction | s on page 2) | |

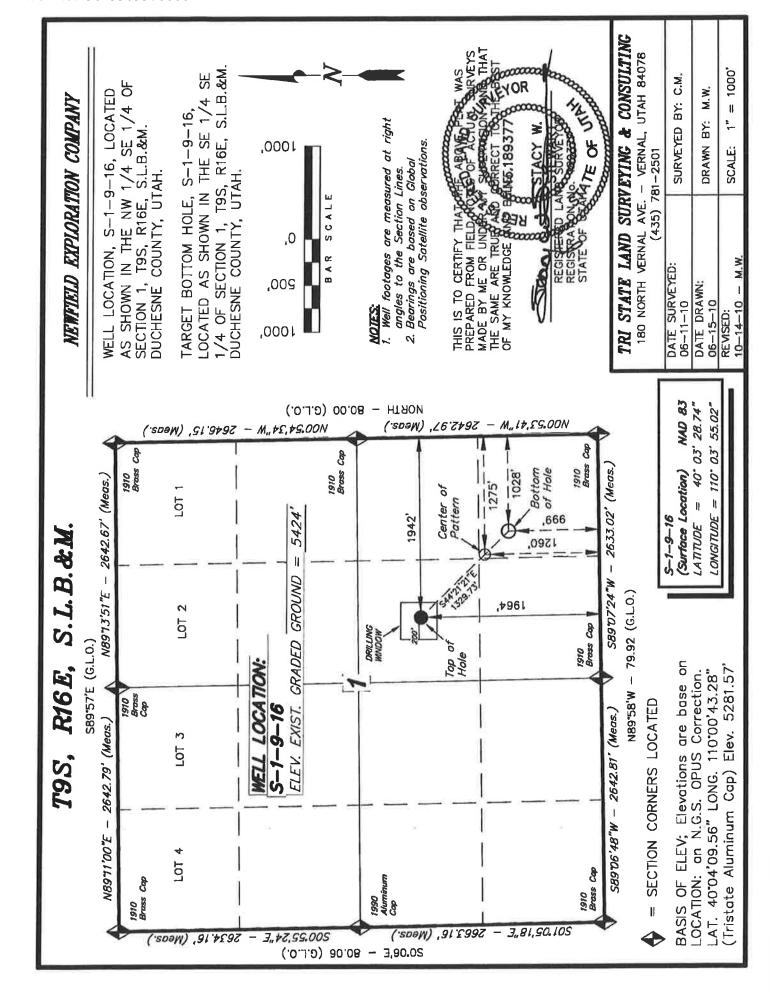

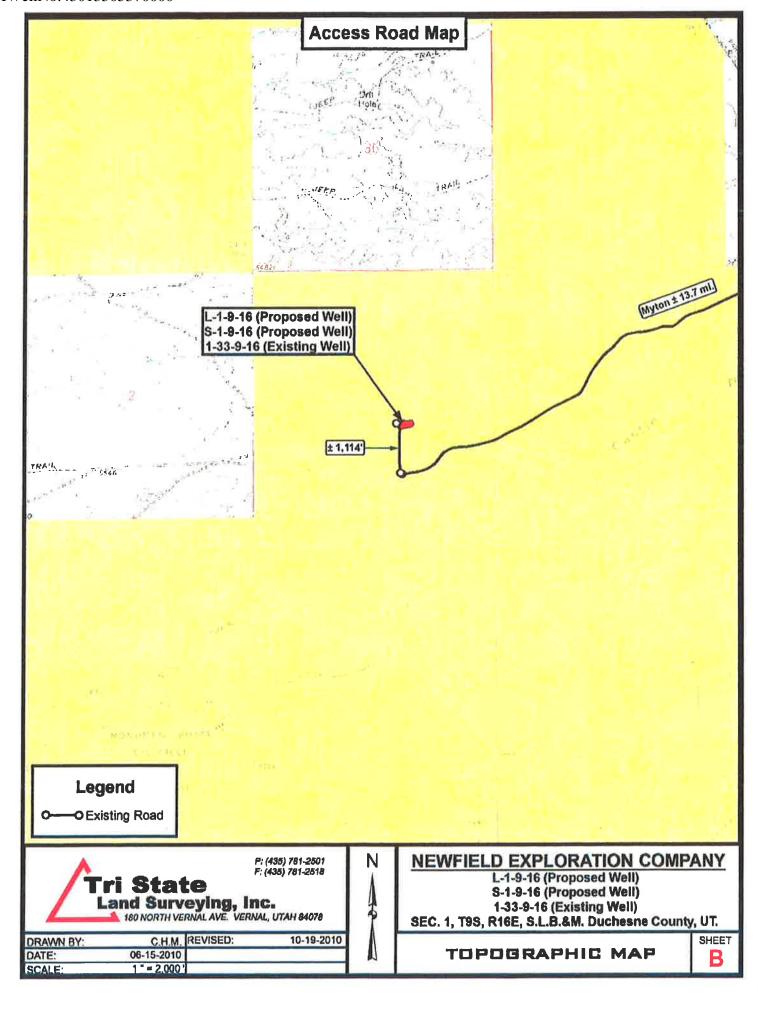

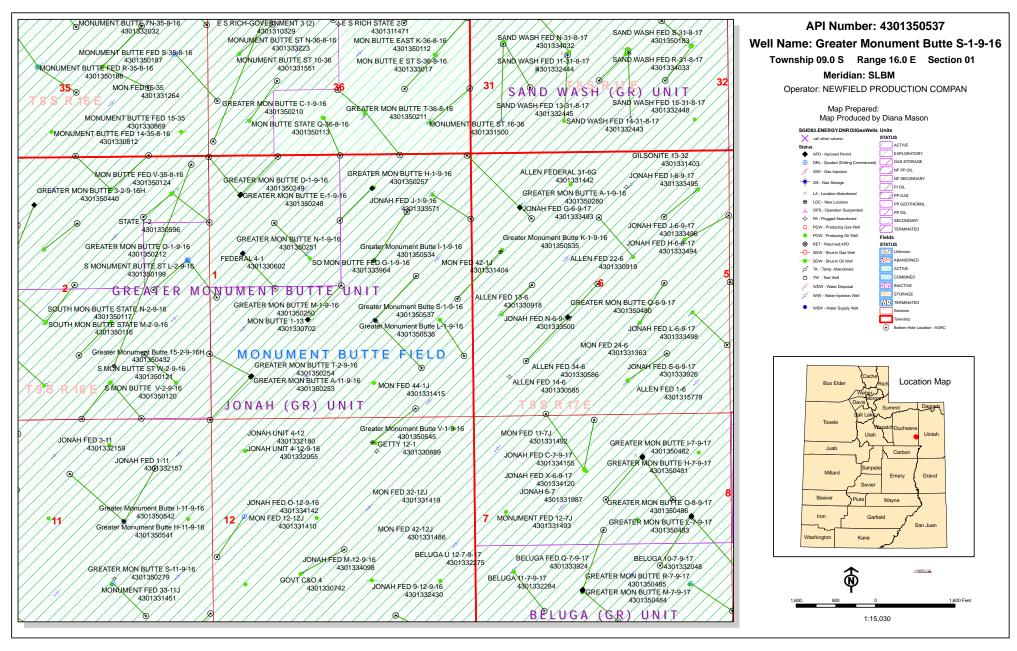

WORKSHEET APPLICATION FOR PERMIT TO DRILL


APD RECEIVED: 12/8/2010 **API NO. ASSIGNED:** 43013505370000 WELL NAME: Greater Monument Butte S-1-9-16 **OPERATOR:** NEWFIELD PRODUCTION COMPANY (N2695) **PHONE NUMBER:** 435 646-4825 **CONTACT:** Mandie Crozier PROPOSED LOCATION: NWSE 01 090S 160E **Permit Tech Review: SURFACE:** 1964 FSL 1942 FEL **Engineering Review: BOTTOM:** 0999 FSL 1028 FEL Geology Review: **COUNTY: DUCHESNE LATITUDE:** 40.05794 **LONGITUDE:** -110.06459 UTM SURF EASTINGS: 579782.00 **NORTHINGS:** 4434397.00 FIELD NAME: MONUMENT BUTTE LEASE TYPE: 1 - Federal **LEASE NUMBER:** UTU-52013 PROPOSED PRODUCING FORMATION(S): GREEN RIVER SURFACE OWNER: 1 - Federal **COALBED METHANE: NO RECEIVED AND/OR REVIEWED: LOCATION AND SITING:** ✓ PLAT R649-2-3. Unit: GMBU (GRRV) Bond: FEDERAL - WYB000493 **Potash** R649-3-2. General Oil Shale 190-5 **Oil Shale 190-3** R649-3-3. Exception Oil Shale 190-13 **Drilling Unit** Board Cause No: Cause 213-11 Water Permit: 437478 **Effective Date:** 11/30/2009 **RDCC Review:** Siting: Suspends General Siting **Fee Surface Agreement Intent to Commingle** ✓ R649-3-11. Directional Drill **Commingling Approved**

Comments: Presite Completed

Stipulations: 4 - Federal Approval - dmason

15 - Directional - dmason 27 - Other - bhill

API Well No: 43013505370000



State of Utah

DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER
Executive Director

Division of Oil, Gas and Mining

JOHN R. BAZA
Division Director

Permit To Drill

Well Name: Greater Monument Butte S-1-9-16

API Well Number: 43013505370000 Lease Number: UTU-52013 Surface Owner: FEDERAL Approval Date: 12/14/2010

Issued to:

NEWFIELD PRODUCTION COMPANY, Rt 3 Box 3630, Myton, UT 84052

Authority:

Pursuant to Utah Code Ann. §40-6-1 et seq., and Utah Administrative Code R649-3-1 et seq., the Utah Division of Oil, Gas and Mining issues conditions of approval, and permit to drill the listed well. This permit is issued in accordance with the requirements of Cause 213-11. The expected producing formation or pool is the GREEN RIVER Formation(s), completion into any other zones will require filing a Sundry Notice (Form 9). Completion and commingling of more than one pool will require approval in accordance with R649-3-22.

Duration:

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date

General:

Compliance with the requirements of Utah Admin. R. 649-1 et seq., the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

Conditions of Approval:

State approval of this well does not supercede the required federal approval, which must be obtained prior to drilling.

In accordance with Utah Admin. R.649-3-11, Directional Drilling, the operator shall submit a complete angular deviation and directional survey report to the Division within 30 days following completion of the well.

Production casing cement shall be brought up to or above the top of the unitized interval for the Greater Monument Butte Unit (Cause No. 213-11).

Notification Requirements:

The operator is required to notify the Division of Oil, Gas and Mining of the following actions during drilling of this well:

• Within 24 hours following the spudding of the well – contact Carol Daniels at 801-538-5284 (please leave a voicemail message if not available)
OR

submit an electronic sundry notice (pre-registration required) via the Utah Oil & Gas website at https://oilgas.ogm.utah.gov

API Well No: 43013505370000

Reporting Requirements:

All reports, forms and submittals as required by the Utah Oil and Gas Conservation General Rules will be promptly filed with the Division of Oil, Gas and Mining, including but not limited to:

- Entity Action Form (Form 6) due within 5 days of spudding the well
- Monthly Status Report (Form 9) due by 5th day of the following calendar month
- Requests to Change Plans (Form 9) due prior to implementation
- Written Notice of Emergency Changes (Form 9) due within 5 days
- Notice of Operations Suspension or Resumption (Form 9) due prior to implementation
- Report of Water Encountered (Form 7) due within 30 days after completion
- Well Completion Report (Form 8) due within 30 days after completion or plugging

Approved By:

For John Rogers Associate Director, Oil & Gas Form 3160-3 (August 2007)

UNITED STATES DEPARTMENT OF THE INTERIOR

FORM APPROVED OMB No. 1004-0137 Expires July 31, 2010

5. Lease Serial No.

| BUREAU OF LAND MAN | l u | UTU-52013 | | | |
|---|---|--|--|--------------------|--|
| APPLICATION FOR PERMIT TO | 6. It | 6. If Indian, Allotee or Tribe Name NA | | | |
| la. Type of work: DRILL REENTH | ER . | 3 | Unit or CA Agreement reater Monument | • | |
| Ib. Type of Well: ✓ Oil Well ☐ Gas Well ☐ Other ✓ Single Zone ☐ Multiple Zone ☐ Sease Name and Well No. Greater Monument Butte S-1-9-1 | | | | | |
| Name of Operator Newfield Production Company | | | PI Well No. | 0537 | |
| 3a. Address Route #3 Box 3630, Myton UT 84052 | 3b. Phone No. (include area code) (435) 646-3721 | i | 10. Field and Pool, or Exploratory Monument Butte | | |
| 4. Location of Well (Report location clearly and in accordance with an | y State requirements.*) | · | 11. Sec., T. R. M. or Blk. and Survey or Area | | |
| At surface NW/SE 1964' FSL 1942' FEL Sec. 1, T9S | • | i | Sec. 1, T9S R16E | | |
| At proposed prod. zone SE/SE 999' FSL 1028' FEL Sec. 1, | • | | | | |
| 14. Distance in miles and direction from nearest town or post office* Approximately 13.9 miles south of Myton, UT | , | | unty or Parish uchesne | 13. State | |
| 15. Distance from proposed* | 16. No. of acres in lease | 17. Spacing Unit de | dicated to this well | | |
| location to nearest property or lease line, ft. Approx. 292' f/lse, NA' f/unit (Also to nearest drig. unit line, if any) | 120.00 | 20 A | 20 Acres | | |
| 18. Distance from proposed location* | 19. Proposed Depth | 20. BLM/BIA Bond | l No. on file | | |
| 18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. Approx. 830' | 6,341! | WYB000 | 493 | | |
| 21. Elevations (Show whether DF, KDB, RT, GL, etc.) | 22. Approximate date work will star | | | | |
| 5424' GL | 120tr.001 | (7) da | sys from SPUD to | rig release | |
| | 24. Attachments | | | | |
| he following, completed in accordance with the requirements of Onshore | e Oil and Gas Order No.1, must be att | ached to this form: | | | |
| Well plat certified by a registered surveyor. A Drilling Plan. A Surface Use Plan (if the location is on National Forest System I SUPO must be filed with the appropriate Forest Service Office). | | ation | • | - ' | |
| SOFO must be thed with the appropriate Forest Service Office). | 6. Such other site s BLM. | pecific information | and/or plans as may | be required by the | |
| 25. Signature Cardio Carin | Name (Printed/Typed) Mandie Crozier | | Date | 0/8/10 | |
| Title Regulatory Specialist | | | | | |
| Approved by (Signature) | Name (Printed/Typed) Jerry | Kenczka | Date | AUG 05 20 | |
| Assistant Field Manager Lantis & Mineral Resources | | FIELD OF | FICE | | |
| Application approval does not warrant or certify that the applicant holds onduct operations thereon. Conditions of approval, if any, are attached. | legal or equitable title to those rights | | which would entitle | the applicant to | |
| itle 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a critates any false, fictitious or fraudulent statements or representations as to | me for any person knowingly and we o any matter within its jurisdiction. | ilfully to make to an | y department or age | ncy of the United | |


(Continued on page 2)

NOTICE OF APPROVAL

*(Instructions on page 2)

DEC 0 9 2010

BLM VERNAL, UTAH

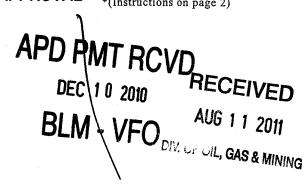



UNITED STATES DEPARTMENT OF THE INTERIOR **BUREAU OF LAND MANAGEMENT VERNAL FIELD OFFICE**

VERNAL, UT 84078

(435) 781-440



CONDITIONS OF APPROVAL FOR APPLICATION FOR PERMIT TO DRILL

| Company: | Newfield Production Company | Location: | NWSE, Sec. 1, T9S, R16E (S) | | |
|----------|---------------------------------|------------|--|--|--|
| Well No: | Greater Monument Butte S-1-9-16 | Lease No: | SESE, Sec. 1, T9S, R16E (B) UTU-52013 | | |
| API No: | 43-013-50537 | Agreement: | Greater Monument Butte Unit | | |

OFFICE NUMBER:

170 South 500 East

(435) 781-4400

OFFICE FAX NUMBER: (435) 781-3420

A COPY OF THESE CONDITIONS SHALL BE FURNISHED TO YOUR FIELD REPRESENTATIVE TO INSURE COMPLIANCE

All lease and/or unit operations are to be conducted in such a manner that full compliance is made with the applicable laws, regulations (43 CFR Part 3160), and this approved Application for Permit to Drill including Surface and Downhole Conditions of Approval. The operator is considered fully responsible for the actions of his subcontractors. A copy of the approved APD must be on location during construction, drilling, and completion operations. This permit is approved for a two (2) year period, or until lease expiration, whichever occurs first. An additional extension, up to two (2) years, may be applied for by sundry notice prior to expiration.

NOTIFICATION REQUIREMENTS

| Location Construction (Notify Environmental Scientist) | - | Forty-Eight (48) hours prior to construction of location and access roads. |
|--|---|--|
| Location Completion (Notify Environmental Scientist) | - | Prior to moving on the drilling rig. |
| Spud Notice (Notify Petroleum Engineer) | - | Twenty-Four (24) hours prior to spudding the well. |
| Casing String & Cementing (Notify Supv. Petroleum Tech.) | - | Twenty-Four (24) hours prior to running casing and cementing all casing strings to: <u>ut_vn_opreport@blm.gov</u> . |
| BOP & Related Equipment Tests (Notify Supv. Petroleum Tech.) | - | Twenty-Four (24) hours prior to initiating pressure tests. |
| First Production Notice (Notify Petroleum Engineer) | _ | Within Five (5) business days after new well begins or production resumes after well has been off production for more than ninety (90) days. |
| | | more than ninety (90) days. |

Page 2 of 8 Well: GMB S-1-9-16 8/3/2011

SURFACE USE PROGRAM CONDITIONS OF APPROVAL (COAs)

- All new and replacement internal combustion gas field engines of less than or equal to 300 designrated horsepower must not emit more than 2 gms of NO_x per horsepower-hour. This requirement does not apply to gas field engines of less than or equal to 40 design-rated horsepower.
- All and replacement internal combustion gas field engines of greater than 300 design rated horsepower must not emit more than 1.0 gms of NO_x per horsepower-hour.
- If there is an active Gilsonite mining operation within 2 miles of the well location, operator shall notify the Gilsonite operator at least 48 hours prior to any blasting during construction.
- If paleontological materials are uncovered during construction, the operator is to immediately stop work and contact the Authorized Officer (AO). A determination will be made by the AO as to what mitigation may be necessary for the discovered paleontologic material before construction can continue.

CONDITIONS OF APPROVAL:

Company/Operator: Newfield Production Company

Well Name & Number: Greater Monument Butte L-1-9-16, Greater Monument Butte S-1-9-

16, Greater Monument Butte K-1-9-16

Surface Ownership:

BLM

Lease Number:

UTU-52013, UTU-020252A

Onsite Date:

11/09/2010

Location:

NWSE Sec. 1, T9S R16E (Host Well 1-33-916), Lot 5, Sec. 6, T9S R17E

Host Well 12-6-9-17

Date APD Received:

12/09/2010, 12/10/2010

CONDITIONS OF APPROVAL:

Threatened, Endangered or Candidate Plant Species

• *Discovery Stipulation*: Re-initiation of section 7 consultation with the USFWS will be sought immediately if any loss of plants or occupied habitat for Pariette cactus or Uinta Basin hookless cactus is anticipated as a result of project activities.

Wildlife

- Construction and drilling is not allowed from May 1st June 15th to minimize impacts during Mountain plover nesting.
- Construction and drilling is not allowed from March 1 August 31 to minimize impacts during burrowing owl nesting.

Page 3 of 8 Well: GMB S-1-9-16 8/3/2011

- If it is anticipated that construction or drilling will occur during the given timing restrictions, a BLM or qualified biologist shall be notified so surveys can be conducted. Depending upon the results of the surveys, permission to proceed may or may not be or granted by the BLM Authorized Officer.
 - White-tailed prairie dog burrows and animals will be recorded/mapped while conducting (to protocol) burrowing owl surveys
 - Mountain plover surveys will be conducted to protocol by a professional environmental consulting firm biologist prior to any ground disturbing activities. Reports from survey results must be reviewed by a BLM minerals biologist prior to proceeding with the project.
- The reclamation seed mix will incorporate low growing grasses and not crested wheatgrass since this negatively impacts mountain plover habitat.
- Hospital mufflers will be installed on new and existing pump jacks at the host well locations.
- Screening will be placed on stacks and on other openings of heater-treaters or fired vessels to prevent entry by migratory birds.
- No construction or drilling will occur from March 01 to August 31 to protect ferruginous hawks during nesting.
- No construction or drilling will occur from January 01 to August 31 to protect golden eagles during nesting.
- If it is anticipated that construction or drilling will occur during the given timing restrictions, a BLM or qualified biologist shall be notified so surveys can be conducted. Depending upon the results of the surveys, permission to proceed may or may not be recommended or granted by the BLM biologist.
 - O Three raptor surveys must be conducted during the nesting season within ½ mile of the project area. It is recommended that these surveys be spaced three weeks apart, so that nesting status and reproductive success can be verified and documented.

Reclamation

- Reclamation will be completed in accordance with the Newfield Exploration Company Castle Peak and Eight Mile Flat Reclamation Plan on file with the Vernal Field Office of the BLM.
- Appropriate erosion control and re-vegetation measures will be employed. In areas with unstable soils where
 seeding alone may not adequately control erosion, grading will be used to minimize slopes and water bars will
 be installed on disturbed slopes. Erosion control efforts will be monitored by Newfield and, if necessary,
 modifications will be made to control erosion.

Seed Mix (Interim and Final Reclamation)

| Common Name | Latin Name | Pure Live Seed (lbs/acre) | Seed Planting Depth |
|-------------------------|------------------------|------------------------------|---------------------|
| Squirreltail grass | Elymus elymoides | 2.0 | 1/4 - 1/2" |
| Needle and thread grass | Hesperostipa comata | 2.0 | 1/2" |
| Siberian Wheatgrass | Agropyron fragile | 2.0 | 1/2" |
| Shadscale saltbush | Atriplex confertifolia | 2.0 | 1/2" |
| Four-wing saltbush | Atriplex canescens | 2.0 | 1/2" |
| Gardner's saltbush | Atriplex gardneri | 2.0 | 1/2" |
| Blue flax (Lewis flax) | Linum lewisii | 1.0 | 1/8 - 1/4" |

Page 4 of 8 Well: GMB S-1-9-16 8/3/2011

- All pounds are pure live seed.
- All seed and mulch will be certified weed free.
- Rates are set for drill seeding; double rate if broadcasting.

Monitoring and Reporting

- The operator shall submit a Sundry Notice (Form 3160-5) to the BLM Authorized Officer (AO) that designates the proposed site-specific monitoring and reference sites chosen for the location. A description of the proposed sites shall be included, as well as a map showing the locations of the proposed sites.
- The operator shall submit a Sundry Notice (Form 3160-5) to the BLM Authorized Officer (AO) 3 growing seasons after reclamation efforts have occurred evaluating the status of the reclaimed areas in order to determine whether the BLM standards set forth in the Green River District Reclamation Guidelines have been met (30% or greater basal cover).

Page 5 of 8 Well: GMB S-1-9-16 8/3/2011

DOWNHOLE PROGRAM CONDITIONS OF APPROVAL (COAs)

SITE SPECIFIC DOWNHOLE COAs:

• The operator shall comply with all applicable requirements in the SOP (version: "Greater Monument Butte Green River Development Program", June 24, 2008). The operator shall also comply with applicable laws and regulations; with the lease terms, Onshore Oil and Gas Orders, NTL's; and with other orders and instructions of the authorized officer.

All provisions outlined in Onshore Oil & Gas Order #2 Drilling Operations shall be strictly adhered to. The following items are emphasized:

DRILLING/COMPLETION/PRODUCING OPERATING STANDARDS

- The spud date and time shall be reported orally to Vernal Field Office within 24 hours of spudding.
- Notify Vernal Field Office Supervisory Petroleum Engineering Technician at least 24 hours in advance of casing cementing operations and BOPE & casing pressure tests.
- All requirements listed in Onshore Order #2 III. E. Special Drilling Operations are applicable for air drilling of surface hole.
- Blowout prevention equipment (BOPE) shall remain in use until the well is completed or abandoned. Closing unit controls shall remain unobstructed and readily accessible at all times. Choke manifolds shall be located outside of the rig substructure.
- All BOPE components shall be inspected daily and those inspections shall be recorded in the daily drilling report. Components shall be operated and tested as required by Onshore Oil & Gas Order No. 2 to insure good mechanical working order. All BOPE pressure tests shall be performed by a test pump with a chart recorder and <u>NOT</u> by the rig pumps. Test shall be reported in the driller's log.
- BOP drills shall be initially conducted by each drilling crew within 24 hours of drilling out from under the surface casing and weekly thereafter as specified in Onshore Oil & Gas Order No. 2.
- Casing pressure tests are required before drilling out from under all casing strings set and cemented in place.
- No aggressive/fresh hard-banded drill pipe shall be used within casing.
- Cement baskets shall not be run on surface casing.
- The operator must report all shows of water or water-bearing sands to the BLM. If flowing water is encountered it must be sampled, analyzed, and a copy of the analyses submitted to the BLM Vernal Field Office.

Page 6 of 8 Well: GMB S-1-9-16 8/3/2011

- The operator must report encounters of all non oil & gas mineral resources (such as Gilsonite, tar sands, oil shale, trona, etc.) to the Vernal Field Office, in writing, within 5 working days of each encounter. Each report shall include the well name/number, well location, date and depth (from KB or GL) of encounter, vertical footage of the encounter and, the name of the person making the report (along with a telephone number) should the BLM need to obtain additional information.
- A complete set of angular deviation and directional surveys of a directional well will be submitted to the Vernal BLM office engineer within 30 days of the completion of the well.
- While actively drilling, chronologic drilling progress reports shall be filed directly with the BLM,
 Vernal Field Office on a weekly basis in sundry, letter format or e-mail to the Petroleum Engineers until the well is completed.
- A cement bond log (CBL) will be run from the production casing shoe to the <u>top of cement</u> and shall be utilized to determine the bond quality for the production casing. Submit a field copy of the CBL to this office.
- Please submit an electronic copy of all other logs run on this well in LAS format to UT_VN_Welllogs@BLM.gov. This submission will supersede the requirement for submittal of paper logs to the BLM.
- There shall be no deviation from the proposed drilling, completion, and/or workover program as approved. Safe drilling and operating practices must be observed. Any changes in operation must have prior approval from the BLM Vernal Field Office.

Page 7 of 8 Well: GMB S-1-9-16 8/3/2011

OPERATING REQUIREMENT REMINDERS:

- All wells, whether drilling, producing, suspended, or abandoned, shall be identified in accordance with 43 CFR 3162.6. There shall be a sign or marker with the name of the operator, lease serial number, well number, and surveyed description of the well.
- For information regarding production reporting, contact the Office of Natural Resources Revenue (ONRR) at www.ONRR.gov.
- Should the well be successfully completed for production, the BLM Vernal Field office must be notified when it is placed in a producing status. Such notification will be by written communication and must be received in this office by not later than the fifth business day following the date on which the well is placed on production. The notification shall provide, as a minimum, the following informational items:
 - o Operator name, address, and telephone number.
 - o Well name and number.
 - o Well location (1/41/4, Sec., Twn, Rng, and P.M.).
 - Date well was placed in a producing status (date of first production for which royalty will be paid).
 - o The nature of the well's production, (i.e., crude oil, or crude oil and casing head gas, or natural gas and entrained liquid hydrocarbons).
 - The Federal or Indian lease prefix and number on which the well is located; otherwise the non-Federal or non-Indian land category, i.e., State or private.
 - o Unit agreement and/or participating area name and number, if applicable.
 - o Communitization agreement number, if applicable.
- Any venting or flaring of gas shall be done in accordance with Notice to Lessees (NTL) 4A and needs prior approval from the BLM Vernal Field Office.
- All undesirable events (fires, accidents, blowouts, spills, discharges) as specified in NTL 3A will be reported to the BLM, Vernal Field Office. Major events, as defined in NTL3A, shall be reported verbally within 24 hours, followed by a written report within 15 days. "Other than Major Events" will be reported in writing within 15 days. "Minor Events" will be reported on the Monthly Report of Operations and Production.
- Whether the well is completed as a dry hole or as a producer, "Well Completion and Recompletion Report and Log" (BLM Form 3160-4) shall be submitted not later than 30 days after completion of the well or after completion of operations being performed, in accordance with 43 CFR 3162.4-1. Two copies of all logs run, core descriptions, and all other surveys or data obtained and compiled during the drilling, workover, and/or completion operations, shall be filed on BLM Form 3160-4. Submit with the well completion report a geologic report including, at a minimum, formation tops, and a summary and conclusions. Also include deviation surveys, sample descriptions, strip logs, core data, drill stem test data, and results of production tests if performed. Samples (cuttings, fluid, and/or gas) shall be submitted only when requested by the BLM, Vernal Field Office.

Page 8 of 8 Well: GMB S-1-9-16 8/3/2011

- All off-lease storage, off-lease measurement, or commingling on-lease or off-lease, shall have prior written approval from the BLM Vernal Field Office.
- Oil and gas meters shall be calibrated in place prior to any deliveries. The BLM Vernal Field Office Petroleum Engineers will be provided with a date and time for the initial meter calibration and all future meter proving schedules. A copy of the meter calibration reports shall be submitted to the BLM Vernal Field Office. All measurement facilities will conform to the API standards for liquid hydrocarbons and the AGA standards for natural gas measurement. All measurement points shall be identified as the point of sale or allocation for royalty purposes.
- A schematic facilities diagram as required by Onshore Oil & Gas Order No. 3 shall be submitted to the BLM Vernal Field Office within 30 days of installation or first production, whichever occurs first. All site security regulations as specified in Onshore Oil & Gas Order No. 3 shall be adhered to. All product lines entering and leaving hydrocarbon storage tanks will be effectively sealed in accordance with Onshore Oil & Gas Order No. 3.
- Any additional construction, reconstruction, or alterations of facilities, including roads, gathering lines, batteries, etc., which will result in the disturbance of new ground, shall require the filing of a suitable plan and need prior approval of the BLM Vernal Field Office. Emergency approval may be obtained orally, but such approval does not waive the written report requirement.
- No location shall be constructed or moved, no well shall be plugged, and no drilling or workover
 equipment shall be removed from a well to be placed in a suspended status without prior approval of
 the BLM Vernal Field Office. If operations are to be suspended for more than 30 days, prior
 approval of the BLM Vernal Field Office shall be obtained and notification given before resumption
 of operations.
- Pursuant to Onshore Oil & Gas Order No. 7, this is authorization for pit disposal of water produced from this well for a period of 90 days from the date of initial production. A permanent disposal method must be approved by this office and in operation prior to the end of this 90-day period. In order to meet this deadline, an application for the proposed permanent disposal method shall be submitted along with any necessary water analyses, as soon as possible, but no later than 45 days after the date of first production. Any method of disposal which has not been approved prior to the end of the authorized 90-day period will be considered as an Incident of Noncompliance and will be grounds for issuing a shut-in order until an acceptable manner for disposing of said water is provided and approved by this office.
- Unless the plugging is to take place immediately upon receipt of oral approval, the Field Office Petroleum Engineers must be notified at least 24 hours in advance of the plugging of the well, in order that a representative may witness plugging operations. If a well is suspended or abandoned, all pits must be fenced immediately until they are backfilled. The "Subsequent Report of Abandonment" (Form BLM 3160-5) must be submitted within 30 days after the actual plugging of the well bore, showing location of plugs, amount of cement in each, and amount of casing left in hole, and the current status of the surface restoration.

BLM - Vernal Field Office - Notification Form

Operator Newfield Exploration Rig Name/# Ross 29 Submitted By Branden Arnold Phone Number 435-401-0223 Well Name/Number GMB S-1-9-16 Otr/Otr NW/SE Section 1 Township 9S Range 16E Lease Serial Number <u>UTU-52013</u> API Number 43-013-50537 Spud Notice – Spud is the initial spudding of the well, not drilling out below a casing string. Date/Time 8/23/11 9:00 AM \bowtie PM \bowtie <u>Casing</u> – Please report time casing run starts, not cementing times. Surface Casing **Intermediate Casing Production Casing** Liner Other Date/Time <u>8/23/11</u> <u>3:00</u> AM ☐ PM ⊠ BOPE Initial BOPE test at surface casing point BOPE test at intermediate casing point 30 day BOPE test Other Date/Time _____ AM PM Remarks _____

OPERATOR: NEWFIELD PRODUCTION COMPANY

OPERATOR ACCT. NO.

N2695

ADDRESS: RT. 3 BOX 3630 MYTON, UT 84052

| ACTION | CURRENT ENTITY NO. | NEW ENTITY NO. | API NUMBER | WELL NAME | T | *** | WELL | OCATION | | 40.10 | | |
|----------------------|---|-------------------|------------|-----------------------|------|------|-----------|---------|------------------|--|-------------------|--|
| | | 2/11/11/2 | | | QQ | SC | <u> </u> | RG | COUNTY | SPUD DATE | EFFECTIVE DATE | |
| В | 99999 | 17400 | 4301350697 | GMBU B-10-9-16 | SWSE | 3 | 98 | 16E | DUCHESNE | 8/25/2011 | 8/31/11 | |
| | COMMENTS: GRRU |) | | BHL : See 1 | O NE | NE | | | | | | |
| CODE | CURRENT ENTITY NO. | NEW ENTITY NO. | API NUMBER | WELL NAME | | | LL LOCAT | | | SPUD | EFFECTIVE | |
| <u>A</u> | 99999 | 18195 | 4304751747 | LAMB #14-2-4-1 | SESW | 2 | тр 4S | 1W | UINTAH | 8/24/2011 | 8/31/11 | |
| | CONFIDENTIAL | | | | | | | | | | | |
| ACTION CODE | CURRENT ENTITY NO. | NEW ENTITY NO. | API NUMBER | WELL NAME | σα | SC I | WELL L | OCATION | COUNTY | SPUD DATE | EFFECTIVE | |
| В | 99999 | 17400 | 4301350794 | GMBU M-16-9-17 | NWSE | 16 | 98 | | DUCHESNE | 8/18/2011 | 8/31/11 | |
| | GRRV | | | BHL=SENL | J | | | | | | 7 | |
| CODE | CURRENT ENTITY NO. | NEW ENTITY NO. | API NUMBER | WELL NAME | QQ | sc | WELL LO | CATION | COUNTY | SPUD DATE | EFFECTIVE | |
| В | 99999 | 17400 | 4301350791 | GMBU L-16-9-17 | NWSE | 16 | 98 | | DUCHESNE | 8/18/2011 | 8/31/11 | |
| ACTION | GRRU | NEW T | API NUMBER | BAL-SENE | | | | | | | | |
| CODE | ENTITY NO. | ENTITY NO. | | T S Locales & William | aa | sc | TP | RG | COUNTY | SPUD DATE | EFFECTIVE DATE | |
| В | 99999 | 17400 | 4301350696 | GMBU R-3-9-16 | SWSE | 3 | 98 | 16E | DUCHESNE | 8/24/2011 | 8/31/11 | |
| | GRRV | | | BHL=NESU |) | | | | | · And the state of | , , , | |
| ACTION CODE | CURRENT ENTITY NO. | NEW ENTITY NO. | API NUMBER | WELL NAME | QQ | sc | WELL LO | | | SPUD | EFFECTIVE | |
| В | 99999 | 17400 | 4301350537 | GREATER MON BUTTE | | | | RG | COUNTY | DATE | DATE | |
| | 33333 | 17400 | 4301330337 | S-1-9-16 | NWSE | 1 | 95 | 16E | DUCHESNE | 8/23/2011 | 8/31/// | |
| ACTION C | GRPU CODES (See Instructions on back | 21/2-1 | | BH=SESE | | | | | | 1 nagyangadi Miriyaha | , | |
| A- 1 B- 1 C- 1 | ADDES (See Instructions on back, inow entity for now woll (single w woll to existing entity (group or u rom one existing entity to another well from one existing entity to a r | RECEIVED | | | | | Signature | | Jentri Park | | | |
| | her (explain in comments section | | | AUG 3 1 2011 | | | | 1 | Production Clerk | 1/0 | 08/31/11 | |

NOTE: Use COMMENT section to explain why each Action Code was safected.

DIV. OF OIL, GAS & MINING

STATE OF UTAH

(This space for State use only)

DEPARTMENT OF NATURAL RESOURCES 5. LEASE DESIGNATION AND SERIAL NUMBER; DIVISION OF OIL, GAS AND MINING USA UTU-52013 6. IF INDIAN, ALLOTTEE OR TRIBE NAME: SUNDRY NOTICES AND REPORTS ON WELLS 7. UNIT or CA AGREEMENT NAME: Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals. **GMBU** 8. WELL NAME and NUMBER: I. TYPE OF WELL: OIL WELL X GAS WELL OTHER GRTR MON BUTTE S-1-9-16 9. API NUMBER: 2. NAME OF OPERATOR: NEWFIELD PRODUCTION COMPANY 4301350537 3. ADDRESS OF OPERATOR: PHONE NUMBER 10. FIELD AND POOL, OR WILDCAT: Route 3 Box 3630 CITY Myton STATE UT ZIP 84052 435.646.3721 GREATER MB UNIT 4. LOCATION OF WELL: FOOTAGES AT SURFACE: COUNTY: DUCHESNE OTR/OTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: , 1, T9S, R16E STATE: UT CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA TYPE OF SUBMISSION TYPE OF ACTION ACIDIZE DEEPEN REPERFORATE CURRENT FORMATION ■ NOTICE OF INTENT FRACTURE TREAT ALTER CASING SIDETRACK TO REPAIR WELL (Submit in Duplicate) NEW CONSTRUCTION CASING REPAIR TEMPORARITLY ABANDON Approximate date work will CHANGE TO PREVIOUS PLANS OPERATOR CHANGE TUBING REPAIR CHANGE TUBING PLUG AND ABANDON VENT OR FLAIR SUBSEQUENT REPORT CHANGE WELL NAME PLUG BACK WATER DISPOSAL (Submit Original Form Only) CHANGE WELL STATUS PRODUCTION (START/STOP) WATER SHUT-OFF Date of Work Completion: COMMINGLE PRODUCING FORMATIONS RECLAMATION OF WELL SITE X OTHER: - Spud Notice 08/28/2011 CONVERT WELL TYPE RECOMPLETE - DIFFERENT FORMATION 12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc. On 8-24-11 MIRU Ross spud rig #29. Drill 310' of 12 1/4" hole with air mist. TIH W/7 Jt's 8 5/8" J-55 24# csgn. Set @ 310.82'. On 8/27/11 Cement with 160 sks of Class "G" w/ 2% CaCL+ 1/4# Cello Flake. Mixed @ 15.8 ppg> 1.17 cf/sk yeild. Returned 5 bbls cement to pit. NAME (PLEASE PRINT) Johnny Davis TITLE Drilling Foreman 08/28/2011 SIGNATURE

RECEIVED SEP 0 6 2011

NEWFIELD PRODUCTION COMPANY - CASING & CEMENT REPORT

| | | | 8 5/8" | CASING SET AT | | 310.82 | | | |
|----------------|---------|-----------|------------|---------------|------------|-----------|-----------|-------------|---------|
| LAST CASING | | • | | | | | | Exploration | Company |
| DATUM | | | | | WELL | | | | |
| DATUM TO CUT | | | | | FIELD/PRO | _ | | D #00 | |
| DATUM TO BRA | | | | | CONTRAC | TOR & RIG | # | Ross #29 | |
| TD DRILLER | | | ER | | | | | | |
| HOLE SIZE | 12 1/4" | | | | | | | | |
| LOG OF CASING | STRING: | | | | | | | | |
| PIECES | OD | ITEM - M | AKE - DESC | RIPTION | WT/FT | GRD | THREAD | CONDT | LENGTH |
| 1 | | Cameron V | Vellhead | | | | | Α | 1.42 |
| 7 | 8 5/8" | Csg. Shoe | jt. 41.95' | | 24 | J-55 | LTC | Α | 299.4 |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | • | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | - | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| CASING INVENT | ODV BAL | | FEET | JTS | TOTAL LE | NGTH OF S | TPING | | 300.82 |
| TOTAL LENGTH | | G | 300.82 | 7 | • | OFF PIEC | | | 2 |
| LESS NON CSG | | | 1.42 | | | | UT OFF CS | G | 12 |
| PLUS FULL JTS. | | • | 0 | | 4 | ET DEPTH | 0. 0 00 | | 310.82 |
| | TOTAL | | 299.4 | 7 | | | | | |
| TOTAL CSG. DE | | RDS) | 299.4 | 7 | | RE | | | |
| | IMING | | | | 1 | | | | |
| BEGIN RUN CSC | Э. | Spud | 2:30 PM | 8/24/2011 | GOOD CIR | C THRU J | ОВ | Yes | |
| CSG. IN HOLE | | | 3:30 PM | 8/24/2011 | Bbls CMT (| CIRC TO S | URFACE | 5 | |
| BEGIN CIRC | | | 12:03 PM | 8/26/2011 | 1 | CATED PIP | | | |
| BEGIN PUMP CI | MT | | 12:11 PM | 8/26/2011 |] | | | | |
| BEGIN DSPL. CI | MT | | 12:22 PM | 8/26/2011 | BUMPED F | PLUG TO _ | 250 | | |

12:33 PM

8/26/2011

PLUG DOWN

| CEMENT USE |) | | EMENT COMPANY- | Baker Hughes |
|-----------------|-------------|---------------------------|----------------------|---------------------|
| STAGE | # SX | (| EMENT TYPE & ADDITIV | ES ES |
| 1 | 260 | Class G+2% CACL+.25#/sk (| Celloflake | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | HER PLACEMENT | | SHOW MAKE & SPACING |
| Center first jt | top of next | two jts. | | |
| | | | | |

DATE **8/26/2011**

Johnny Davis

COMPANY REPRESENTATIVE

Sundry Number: 20143 API Well Number: 43013505370000

| | STATE OF UTAH | | FORM 9 | | |
|--|---|--|--|--|--|
| | DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MININ | IG | 5.LEASE DESIGNATION AND SERIAL NUMBER: UTU-52013 | | |
| SUNDF | RY NOTICES AND REPORTS O | N WELLS | 6. IF INDIAN, ALLOTTEE OR TRIBE NAME: | | |
| | sals to drill new wells, significantly deepen exingged wells, or to drill horizontal laterals. Use | | 7.UNIT or CA AGREEMENT NAME: GMBU (GRRV) | | |
| 1. TYPE OF WELL Oil Well | | | 8. WELL NAME and NUMBER: GREATER MON BUTTE S-1-9-16 | | |
| 2. NAME OF OPERATOR: NEWFIELD PRODUCTION COM | | 9. API NUMBER: 43013505370000 | | | |
| 3. ADDRESS OF OPERATOR: Rt 3 Box 3630 , Myton, UT, 84 | | NUMBER: | 9. FIELD and POOL or WILDCAT: MONUMENT BUTTE | | |
| 4. LOCATION OF WELL FOOTAGES AT SURFACE: 1964 FSL 1942 FEL | | COUNTY: DUCHESNE | | | |
| QTR/QTR, SECTION, TOWNSHI Qtr/Qtr: NWSE Section: 01 | P, RANGE, MERIDIAN: Township: 09.0S Range: 16.0E Meridian: S | | STATE: UTAH | | |
| 11. CHE | CK APPROPRIATE BOXES TO INDICATE I | NATURE OF NOTICE, REPORT, | OR OTHER DATA | | |
| TYPE OF SUBMISSION | | TYPE OF ACTION | | | |
| | □ ACIDIZE □ CHANGE TO PREVIOUS PLANS □ CHANGE WELL STATUS □ DEEPEN □ OPERATOR CHANGE ✓ PRODUCTION START OR RESUME □ REPERFORATE CURRENT FORMATION □ TUBING REPAIR □ WATER SHUTOFF □ WILDCAT WELL DETERMINATION OMPLETED OPERATIONS. Clearly show all pertines completed on 10/24/2011. Attack status report. | hed is a daily completion A L Oil | · | | |
| NAME (PLEASE PRINT) Jennifer Peatross | PHONE NUMBER 435 646-4885 | TITLE Production Technician | | | |
| SIGNATURE N/A | | DATE 11/7/2011 | | | |

Daily Activity Report

Format For Sundry
GMBU S-1-9-16

8/1/2011 To 12/30/2011

10/6/2011 Day: 1

Completion

Rigless on 10/6/2011 - Run CBL & Perforate 1st stage - NU 6" 5K Cameron BOP. RU H/O truck & pressure test casing, blind rams, csg & casing valves to 4500 psi. RU PSI LLC WLT w/ Crane & run CBL under pressure. WLTD @ 6200 ' & cement top @ 200'. Perforate stage #1,CP-1 sds @ (6080-82', 6075-76', 6051-52', CP-3 sds @ 5918-19',CP-1 sds @ 5742-43') w/ 3 1/8" Port plug guns (16 gram .34" EH 21.00" pen w/120° phasing) w/ 3 spf for total of 15 shots. RD H/O truck & The PSI WLT & mast. Wait on frac crew EWTR148 BBLS

Daily Cost: \$0

Cumulative Cost: \$22,158

10/13/2011 Day: 2

Completion

Rigless on 10/13/2011 - Frac well as detailed in treatment report. - STAGE 2: MIRU Extreme wireline and perforate C-Sand. - STAGE 2: MIRU Baker Hughes. Frac C-Sand as detailed in treatment report. 1337 Bbl to return. - STAGE 1: MIRU Baker Hughes. Frac CP5/CP3/CP1 as detailed in treatment report. 948 Bbl to return. - STAGE 3: MIRU Extreme wireline and perforate D2/D1. - STAGE 3: MIRU Baker Hughes. Frac D2/D1 as detailed in treatment report. 1874.9 Bbl to return. Flowback 720 bbl until oil shows. 1155 bbl to return.

Daily Cost: \$0

Cumulative Cost: \$101,348

10/20/2011 Day: 3

Completion

WWS #3 on 10/20/2011 - MIRU. Set kill plug. RIH with bit and drill 1st plug. - LOAM from GMBU L-1 to GMBU S-2. MIRU check pressure on well (300 psi). Rig up hot oiler. Pump 20 bbls down well. Rig up wireline set kill plug @ 4780. Rig down wireline. Bleed off well. Nipple down Cameron BOPs. Nipple up 5000# BOPs. Rig up floor and tubing works. Wait on tubing. Unload tubing. Pick up and tally used 4 3/4" chomp bit and tubing. Pick up and TIH. Tag plug @ 4780. Rig up slaugh power swivel. Drill out plug 11 min. Circulate well clean. SWIFN. EOT @ 5810.

Daily Cost: \$0

Cumulative Cost: \$113,856

10/21/2011 Day: 4

Completion

WWS #3 on 10/21/2011 - Drill out last 2 plugs and swab. - Check pressure on well (300 tubing and 350 casing). Circulate well to production tank. Continue to pick up and TIH to plug @ 4990'. Drill out plug 15 min. Continue to pick up and TIH tag plug @ 5150. Drill out plug 23 min. Continue to pick up and TIH with tubing. Tag fill @ 6172'. Clean out 75' of fill to PB @ 6186. Rig up swab. Make 6 swab runs. Well started to flow. Swab and flow back 190 bbls with no sand and good oil. SWIFN.

Daily Cost: \$0

Cumulative Cost: \$125,186

10/24/2011 Day: 5 Completion

WWS #3 on 10/24/2011 - RIH with production tubing and rods. PWOP @ 17:30. - Check pressure on well (300 tubing and 350 casing). Pump 30 Bbls down tubing. Pick up and TIH to PB @ 6247. No new fill circulate well with 200 bbls brine. Lay down extra tubing. TOOH lay down 4 3/4" chomp bit. Pick up and TIH with BHA and tubing as follows: NC, 2 Jts, PSN, 1 Jt, TAC, 194 Jts. Nipple down BOPs. Set TAC with 18000# tension. Land tubing with tubing hanger. Nipple up B-1 adaptor flange with TAC @ 6059.57, PSN @6093.61, EOT @ 6157.58. X-over to rods equipment. Flush tubing with 60 bbls. Pick up and prime central hydraulic 25-175-RHAC-20-4-21-24 pump with 224" max stroke. Pick up and TIH with 12 7/8" 8-per guided, 158 3/4" guided, 72 7/8" 8-per guided, 1 4' 7/8" pony, 1 1/2" 30' polish rod. Seat pump. Rig up pumping unit hang rods off to unit stroke. Pump with unit to 800 psi good pump action. RDMO PWOP @ 5:30. **Finalized**

Daily Cost: \$0

Cumulative Cost: \$212,832

Pertinent Files: Go to File List

⁵ Form 3160-4 (August 2007)

UNITED STATES DEPARTMENT OF THE INTERIOR **BUREAU OF LAND MANAGEMENT**

FORM APPROVED OMB NO. 1004-0137 Expires: July 31, 2010

WELL COMPLETION OR RECOMPLETION REPORT AND LOG

| | W | ELL C | OMPL | ETION | I OR R | RECOMPLE | TION | REPORT | AND L | .og | | | - 1 | ease Seria | 1 No. | | |
|---------------------------|----------------------------|------------------|--|---------------------|--------------------|-----------------|-----------------------|---------------------------|-------------|--------------------|---------------------|-------------------|-------------|------------------------|--------------|--------------------------|-----------|
| la. Type of V | Well Completion: | ☑ Oi | l Well | Gas | s Well ork Over | Dry Deepen | Other Plug B | Back D Diff | f Resyr | | | | | | llottee or T | ribe Name | |
| J F | | | | | | | | | | , | | | | nit or CA BU (GRF | | Name and No. | |
| 2. Name of (| Operator O EXPLOR | RATION | I COMP. | ANY | | | | | | _ | | | 8. L | ease Name BU S-1-9 | e and Well | No. | |
| 3. Address | 1401 17TH S | | | | 90202 | | | 3a. Phone 1 | | ude are | a code) | | 9. A | FI Well N | lo. | | |
| | | | | | | ance with Feder | al requir | (435) 646 rements)* | 1-3/21 | | | | | 13-5053 rield and | Pool or Exp | loratory | |
| At surface | e 1064 F | 21 0 40 | 40' EEI | /NNA//©I | E) 0E0 | . 1, T9S, R16E | - /LI T LL | E2012) | | | | | | | T BUTTE | ock and | |
| | * 1904 F3 | 5L & 19 | 42 FEL | (IAAA) SI | E) 3EC. | . 1, 195, KIDE | = (010- | -52013) | | | | | | urvey or | Area | 1, T9S, R16E | |
| At top pro | d. interval r | eported b | oelow 12 | 963' FS | SL & 12 | 54' FEL (SE/S | E) SEC | C. 1, T9S, R1 | 6E (UT | U-444 | 26) | | 12. (| County or | Parish | 13. State | |
| At total de | epth 1008' | FSL & | 1038' FI | EL (SE/ | SE) SE | C. 1, T9S, R1 | 6E (UT | U-44426) | | | | | DUC | CHESNE | | UT | |
| 14. Date Spt 08/24/201 | udded | | | Date T.D 25/2011 | . Reache | d | | 16. Date Comp | pleted 1 | 0/21/2 Ready to | 2011 2 Prod | | | Elevations 4' GL 54 | | 3, RT, GL)* | |
| 18. Total De | pth: MD | 6305' 0 6140' | | 20,2011 | | ig Back T.D.: | MD 62 TVD 6 | <u></u> | | | | ige Plug | Set: | MD TVD | TOO IND | - | |
| 21. Type El | ectric & Oth | er Mecha | nical Log | s Run (S | ubmit cor | y of each) | EMP |) | | I | as well o | | 7 N | 0 🔲 Y | es (Submit | | |
| | | | | | | EUTRON,GR, | CALIPE | ER/CMT BO | ND | | | run? 1 Survey? | | | es (Submit | | |
| 23. Casing Hole Size | Size/Gra | | <i><u>keport au</u></i> Vt. (#/ft.) | | (MD) | Bottom (MD |) Sta | age Cementer | | of Sks. | 1 | Slurry | | Cemen | ıt Top* | Amount Puil | ed |
| 12-1/4" | 8-5/8" J- | 55 24 | 4# | 0 | | 310' | | Depth | 260 C | of Cen | | (BBI | -) <u> </u> | | | | |
| 7-7/8" | 5-1/2" J- | 55 15 | 5.5# | 0 | | 6292' | | | 230 P | | | | | 200' | | | |
| | | | | | | - | | | 450 50 | 0/50 P | OZ | | | | | | |
| | | | | | | + | | | | _ | | | | | -+ | | |
| | | | | | 1124 | | | | | | | | | | | , | |
| 24. Tubing Size | | Set (MD) | Packe | er Depth (| (MD) | Size | De | pth Set (MD) | Packer | Depth (| MD) | Size | : 1 | Depth | Set (MD) | Packer Depth | (MD) |
| 2-7/8" | | 6158' | TA @ | 6060' | | | | | | | | | | | | • | |
| 25. Producii | Formation | | | Top | , | Bottom | 26. | Perforation Perforated In | | | Si | ze | No. I | foles | | Perf. Status | - |
| A) Green F B) | River | | 4 | 879' | | 6082' | 487 | 9-6082' | · · · · · · | | .36" | | 48 | | | | |
| C) | | | | | - | | | | | _ | | | | | | • | |
| D) | | | | | | | | | | | | | | | | | |
| 27. Acid, Fi | racture, Trea | | ement So | juceze, e | tc. | | | | Amount | and Tva | ne of Ma | aterial | | - | | was Said been it W Reary | Part D |
| 4879-6082 | | vai | Fr | ac w/ 1 | 17537# | s 20/40 white | sand ir | | | | | | es. | | F | EB 1 3 201 | 2 |
| | | | | | | | | | | _ | | | | | Call Com | Mill Market a no | 27.723.75 |
| | | | | | | | | | | | | | | | this sail | <u> </u> | 1: 1 |
| 28. Product Date First | | l A Hours | Test | In | \21 | Coo | Water | Oil Gra | | | | Duodi | iction M | ath a d | | | |
| Produced | Test Date | Tested | Produ | | Dil BBL | | BBL | Corr. A | | Gas Gra | vity | | | | ' x 21' x 2 | 4' RHAC Pump | • |
| | 1 | 24 | | | 57 | 10 | 31 | | | | | | | | | | |
| Choke Size | Tbg. Press. Flwg. SI | Csg. Press. | 24 Hr. Rate | | Dil BBL | Gas MCF | Water BBL | Gas/Oil Ratio | | | ell Status RODUC | | | | | | |
| 28a. Produc | | | | L | | | L | l | ···· | | | | | | | | |
| Date First Produced | Test Date | Hours Tested | Test Produ | | Oil BBL | Gas MCF | Water BBL | Oil Gra Corr. A | | Gas Gra | s ivity | Produ | etion M | lethod | | | |
| Choke Size | Tbg. Press. Flwg. SI | Csg. Press. | 24 Hr. Rate | | oil BBL | Gas MCF | Water BBL | Gas/Oil Ratio | | We | ell Status | <u> </u> | | | | | |

^{*(}See instructions and spaces for additional data on page 2)

| 201 P 1 | | 10 | | | **** | | | | | |
|---|-----------------------------|-------------------|--------------------|---------------------------------------|---------------|--|--------------------------------------|---------------------|------------------------------------|------------------------------|
| Date First | uction - Intel Test Date | Hours | Test | Oil | Gas | Water | Oil Gravity | Gas | Production Method | |
| Produced | | Tested | Production | BBL | MCF | BBL | Corr. API | Gravity | | |
| Choke | Tbg. Press. | | 24 Hr. | Oil | Gas | Water | Gas/Oil | Well Status | | |
| Size | Flwg. SI | Press. | Rate | BBL | MCF | BBL | Ratio | | | |
| | 51 | | → | | | | | | | |
| | iction - Inte | | | · · · · · · · · · · · · · · · · · · · | 1 | | | | | |
| Date First Produced | Test Date | Hours Tested | Test Production | Oil BBL | Gas MCF | Water BBL | Oil Gravity Corr. API | Gas Gravity | Production Method | |
| Troducca | | Colcu | Toddenon | DDL | MICI | BBL | Con. At 1 | Gravity | | |
| Choke | Tbg. Press. | Can | 24 Hr. | Oil | Gas | Water | Gas/Oil | Well Status | | |
| | | Csg. Press. | Rate | BBL | MCF | BBL | Ratio | Well Status | | |
| | SI | | _ | | | | | | | |
| 29 Dienos | ition of Gas | Solid us | ed for fuel, ve | nted etc |) | | | | | |
| _ | USED FOR F | | eu jor juei, ve | писи, сис., | , | | | | | |
| | | | (Include Aqui | forali | | | | 21 Format | tion (Log) Markers | |
| 30. Sumi | iary of Poro | us Zones | (Include Aqui | iers): | | | | 31. FOIHa | non (Log) warkers | |
| | | | | | | | II drill-stem tests, | GEOLOG | SICAL MARKERS | |
| recover | | ervai teste | a, cusnion use | a, time to | ooi open, now | ing and shut-in | pressures and | i | | |
| | | | | | | | | | | |
| Form | nation | Тор | Bottom | | Dee | criptions, Conte | auto ata | | Name | Тор |
| ron | nation | Тор | Bottom | | Des | criptions, Cond | ents, etc. | | Name | Meas. Depth |
| GREEN RIV | /FR | 4879' | 6082' | | | | ··· | GARDEN G | III CH MPK | 3807' |
| ONLEHT | , , , , | | 0002 | | | | | GARDEN G | | 4016' |
| | | | | | | | | GARDEN G | III CH 2 | 4142' |
| | | | | | | | | POINT 3 | OLOH 2 | 4409' |
| | | | | | | | | X MRKR | | 4668' |
| | | | | | | | | Y MRKR | | 4708' |
| | | | | | | | | DOUGLAS | CREEK MRKR | 4833' |
| | | | | | | | | | NATE MRKR | 5084' |
| | | | | | | | | B LIMESTO | NE | 5215' |
| | | | | | | | | CASTLE PE | EAK | 5688' |
| | | | | | | | | BASAL CAR | RBONATE | 6147' |
| | | | | | | | | WASATCH | | 6268' |
| | | | | | | | | | | |
| | | | | | | | | | | |
| 32. Addit | ional remark | s (include | plugging pro | cedure): | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| 33. Indica | ite which ite | ms have b | een attached b | by placing | a check in th | e appropriate b | oxes: | | | |
| ☐ Ele | ctrical/Mecha | nical Logs | (1 full set req | 'd.) | | Geologic Repo | ort DST | Report | ✓ Directional Survey | |
| ☐ Sundry Notice for plugging and cement verification ☐ Core Analysis ☐ Other: Drilling Daily Activity | | | | | | | | | | |
| | | | | | | | | | | p)* |
| | - | | | | лианоп is со | присте апа соп | | | records (see attached instructions | » <i>j</i> |
| N | ame (please | print) | nnifer Peat | 1055 | | | | tion Techniciar | | |
| S | ignature | \ XV | MIL | 7 | | | Date 11/28/2 | 011 | | |
| | | \longrightarrow | | | | | | | | |
| Title 18 U | S.C. Section | n 1001 and | d Title 43 U.S | .C. Section | on 1212, make | it a crime for a | any person knowing s jurisdiction | gly and willfully t | to make to any department or ager | ncy of the United States any |
| anse, men | nous or mau | autoni stat | ZIZICITIS OI TEL | . Journail | and to diff I | THE PERSON OF THE PERSON PERSO | Janoarenon. | | | |

(Continued on page 3) (Form 3160-4, page 2)



NEWFIELD EXPLORATION

USGS Myton SW (UT) SECTION 1 T 9S, R16E S-1-9-16

Wellbore #1

Design: ACTUAL

Standard Survey Report

06 October, 2011



Survey Report

Company: Project:

NEWFIELD EXPLORATION USGS Myton SW (UT)

Site: Well: SECTION 1 T 9S, R16E

Wellbore:

S-1-9-16 Wellbore #1 ACTUAL

Local Co-ordinate Reference:

Well S-1-9-16

TVD Reference: MD Reference:

S-1-9-16 @ 5436.0ft (Newfield Rig #1) S-1-9-16 @ 5436.0ft (Newfield Rig #1)

North Reference:

Database:

Survey Calculation Method:

Minimum Curvature EDM 2003.21 Single User Db

Design: Project

USGS Myton SW (UT), DUCHESNE COUNTY, UT, USA

Map System: Geo Datum:

US State Plane 1983

North American Datum 1983

System Datum:

Mean Sea Level

Map Zone:

Utah Central Zone

Site

SECTION 1 T 9S, R16E

Site Position:

Northing:

7,199,000.00ft

Latitude:

40° 4' 27.544 N

From:

Lat/Long

Easting:

2,041,000.00ft

Longitude:

110° 4' 6.352 W

Position Uncertainty:

0.0 ft

Slot Radius:

Grid Convergence:

0.92°

Well

S-1-9-16, SHL LAT: 40° 03' 28.74, LONG: -110° 03' 55.02

Well Position

+N/-S

0.0 ft 0.0 ft Northing:

7,193,064.92 ft

Latitude:

40° 3' 28.740 N

Position Uncertainty

+E/-W

Easting:

2,041,976.20 ft

Longitude:

110° 3' 55.020 W

0.0 ft Wellhead Elevation: 5,436.0 ft

Ground Level:

5,424.0 ft

Magnetics

Wellbore

Wellbore #1

Model Name

Sample Date

Declination (°)

Dip Angle

Field Strength (nT)

IGRF2010 10/12/2010 11.40

65.82

52,344

Design

ACTUAL

Audit Notes: Version:

1.0

Phase:

0.0

10/6/2011

6,305.0 Survey #1 (Wellbore #1)

ACTUAL

Tie On Depth:

Vertical Section:

Depth From (TVD) (ft)

+N/-S (ft)

0.0

+E/-W (ft) 0.0

0.0 Direction

(°) 135.64

Survey Program From

(ft)

347.0

То (ft)

Survey (Wellbore)

Tool Name

MWD

Description

MWD - Standard

| Measured | | | Vertical | | | Vertical | Dogleg | Build | Turn |
|---------------|--------------------|----------------|---------------|---------------|---------------|-----------------|-------------------|-------------------|-----------|
| Depth (ft) | Inclination (°) | Azimuth (°) | Depth (ft) | +N/-S (ft) | +E/-W (ft) | Section (ft) | Rate (°/100ft) | Rate (°/100ft) | (°/100ft) |
| 0.0 | 0.00 | 0.00 | 0.0 | 0.0 | 0.0 | 0.0 | 0.00 | 0.00 | 0.00 |
| 347.0 | 1.48 | 141.48 | 347.0 | -3.5 | 2.8 | 4.5 | 0.43 | 0.43 | 0.00 |
| 377.0 | 1.45 | 140.60 | 377.0 | -4.1 | 3.3 | 5.2 | 0.12 | -0.10 | -2.93 |
| 408.0 | 1.80 | 99.00 | 407.9 | -4.5 | 4.0 | 6.0 | 3.87 | 1.13 | -134.19 |
| 439.0 | 2.70 | 89.30 | 438.9 | -4.5 | 5.2 | 6.9 | 3.14 | 2.90 | -31.29 |
| 469.0 | 3.20 | 87.60 | 468.9 | -4.5 | 6.8 | 7.9 | 1.69 | 1.67 | -5.67 |
| 500.0 | 3.40 | 88.50 | 499.8 | -4.4 | 8.5 | 9.1 | 0.67 | 0.65 | 2.90 |
| 530.0 | 3.60 | 85.00 | 529.8 | -4.3 | 10.4 | 10.4 | 0.98 | 0.67 | -11.67 |
| 561.0 | 4.00 | 88.00 | 560.7 | -4.2 | 12.4 | 11.7 | 1.44 | 1.29 | 9.68 |
| 591.0 | 4.35 | 87.20 | 590.6 | -4.1 | 14.6 | 13.2 | 1.18 | 1.17 | -2.67 |
| 622.0 | 5.14 | 85.98 | 621.5 | -4.0 | 17.2 | 14.8 | 2.57 | 2.55 | -3.94 |
| 653.0 | 5.70 | 86.90 | 652.4 | -3.8 | 20.1 | 16.8 | 1.83 | 1.81 | 2.97 |
| 683 D | 6.50 | 86 24 | 682.2 | -3.6 | 23.3 | 18.8 | 2 68 | 2 67 | -2 20 |



Survey Report

Company: Project:

NEWFIELD EXPLORATION USGS Myton SW (UT)

Site: Well: SECTION 1 T 9S, R16E S-1-9-16

Wellbore: Design:

Wellbore #1 ACTUAL

Local Co-ordinate Reference:

Well S-1-9-16

TVD Reference: MD Reference:

S-1-9-16 @ 5436.0ft (Newfield Rig #1) S-1-9-16 @ 5436.0ft (Newfield Rig #1)

North Reference:

Survey Calculation Method:

Minimum Curvature

Database:

EDM 2003.21 Single User Db

| Measured | | AND THE RESERVE | Vertical | | | Vertical | Dogleg | Build | Turn |
|----------|-------------|-----------------|----------|--------|-------|----------|-----------|-----------|-----------|
| Depth | Inclination | Azimuth | Depth | +N/-S | +E/-W | Section | Rate | Rate | Rate |
| (ft) | (°) | (°) | (ft) | (ft) | (ft) | (ft) | (°/100ft) | (°/100ft) | (°/100ft) |
| 714.0 | 7.30 | 88.20 | 713.0 | -3.4 | 27.0 | 21.3 | 2.69 | 2.58 | 6.32 |
| 744.0 | 8.20 | 89.50 | 742.7 | -3.3 | 31.0 | 24.1 | 3.06 | 3.00 | 4.33 |
| 775.0 | 8.70 | 91.90 | 773.4 | -3.4 | 35.6 | 27.3 | 1.97 | 1.61 | 7.74 |
| 805.0 | 9.50 | 93.40 | 803.0 | -3.6 | 40.3 | 30.8 | 2.78 | 2.67 | 5.00 |
| 836.0 | 10.10 | 94.00 | 833.5 | -4.0 | 45.6 | 34.7 | 1.96 | 1.94 | 1.94 |
| 881.0 | 9.60 | 98.90 | 877.9 | -4.8 | 53.2 | 40.7 | 2.17 | -1.11 | 10.89 |
| 925.0 | 9.40 | 100.00 | 921.3 | -6.0 | 60.4 | 46.5 | 0.61 | -0.45 | 2.50 |
| 969.0 | 9.60 | 103.00 | 964.7 | -7.5 | 67.5 | 52.5 | 1.21 | 0.45 | 6.82 |
| 1,013.0 | 9.58 | 107.73 | 1,008.1 | -9.4 | 74.6 | 58.9 | 1.79 | -0.05 | 10.75 |
| 1,057.0 | 9.76 | 112.12 | 1,051.4 | -11.9 | 81.5 | 65.5 | 1.72 | 0.41 | 9.98 |
| 1,101.0 | 10.06 | 115.02 | 1,094.8 | -15.0 | 88.4 | 72.5 | 1.32 | 0.68 | 6.59 |
| 1,145.0 | 10.28 | 118.80 | 1,138.1 | -18.5 | 95.4 | 79.9 | 1.60 | 0.50 | 8.59 |
| 1,189.0 | 10.50 | 122.30 | 1,181.4 | -22.5 | 102.2 | 87.5 | 1.52 | 0.50 | 7.95 |
| 1,233.0 | 10.60 | 126.70 | 1,224.6 | -27.1 | 108.8 | 95.4 | 1.84 | 0.23 | 10.00 |
| 1,277.0 | 11.00 | 130.90 | 1,267.8 | -32.2 | 115.3 | 103.6 | 2.01 | 0.91 | 9.55 |
| 1,321.0 | 11.00 | 134.00 | 1,311.0 | -37.9 | 121.4 | 112.0 | 1.34 | 0.00 | 7.05 |
| 1,365.0 | 11.50 | 139.76 | 1,354.2 | -44.2 | 127.3 | 120.6 | 2.79 | 1.14 | 13.09 |
| 1,409.0 | 11.50 | 140.50 | 1,397.3 | -50.9 | 132.9 | 129.3 | 0.34 | 0.00 | 1.68 |
| 1,453.0 | 11.00 | 139.80 | 1,440.5 | -57.5 | 138.4 | 137.9 | 1.18 | -1.14 | -1.59 |
| 1,497.0 | 11.10 | 137.20 | 1,483.6 | -63.8 | 144.0 | 146.3 | 1.16 | 0.23 | -5.91 |
| 1,541.0 | 11.40 | 133.60 | 1,526.8 | -69.9 | 150.0 | 154.9 | 1.74 | 0.68 | -8.18 |
| 1,585.0 | 11.40 | 131.00 | 1,569.9 | -75.8 | 156.5 | 163.6 | 1.17 | 0.00 | -5.91 |
| 1,629.0 | 11.00 | 132.50 | 1,613.1 | -81.4 | 162.8 | 172.1 | 1.12 | -0.91 | 3.41 |
| 1,673.0 | 11.00 | 132.60 | 1,656.3 | -87.1 | 169.0 | 180.5 | 0.04 | 0.00 | 0.23 |
| 1,717.0 | 9.90 | 132.70 | 1,699.6 | -92.5 | 174.9 | 188.4 | 2.50 | -2.50 | 0.23 |
| 1,761.0 | 9.10 | 135.10 | 1,743.0 | -97.6 | 180.1 | 195.7 | 2.03 | -1.82 | 5.45 |
| 1,805.0 | 9.30 | 136.90 | 1,786.4 | -102.6 | 185.0 | 202.7 | 0.80 | 0.45 | 4.09 |
| 1,849.0 | 9.50 | 137.60 | 1,829.8 | -107.9 | 189.9 | 209.9 | 0.52 | 0.45 | 1.59 |
| 1,893.0 | 9.50 | 136.30 | 1,873.2 | -113.2 | 194.9 | 217.2 | 0.49 | 0.00 | -2.95 |
| 1,937.0 | 8.70 | 140.90 | 1,916.6 | -118.4 | 199.5 | 224.1 | 2.46 | -1.82 | 10.45 |
| 1,981.0 | 8.90 | 139.40 | 1,960.1 | -123.6 | 203.8 | 230.8 | 0.69 | 0.45 | -3.41 |
| 2,025.0 | 8.90 | 142.80 | 2,003.6 | -128.9 | 208.0 | 237.6 | 1.20 | 0.00 | 7.73 |
| 2,069.0 | 9.40 | 147.30 | 2,047.0 | -134.6 | 212.0 | 244.5 | 1.98 | 1.14 | 10.23 |
| 2,113.0 | 10.10 | 151.10 | 2,090.4 | -141.0 | 215.9 | 251.7 | 2.16 | 1.59 | 8.64 |
| 2,157.0 | 10.20 | 146.00 | 2,133.7 | -147.6 | 219.9 | 259.3 | 2.05 | 0.23 | -11.59 |
| 2,201.0 | 10.40 | 152.10 | 2,177.0 | -154.4 | 223.9 | 266.9 | 2.52 | 0.45 | 13.86 |
| 2,245.0 | 11.55 | 152.90 | 2,220.2 | -161.8 | 227.8 | 274.9 | 2.64 | 2.61 | 1.82 |
| 2,289.0 | 11.80 | 152.60 | 2,263.3 | -169.7 | 231.9 | 283.4 | 0.58 | 0.57 | -0.68 |
| 2,333.0 | 12.70 | 148.00 | 2,306.3 | -177.8 | 236.5 | 292.5 | 3.02 | 2.05 | -10.45 |
| 2,377.0 | 13.70 | 145.60 | 2,349.1 | -186.2 | 242.0 | 302.3 | 2.59 | 2.27 | -5.45 |
| 2,421.0 | 14.50 | 141.70 | 2,391.8 | -194.8 | 248.4 | 312.9 | 2.82 | 1.82 | -8.86 |
| 2,465.0 | 15.10 | 142.00 | 2,434.3 | -203.7 | 255.3 | 324.1 | 1.37 | 1.36 | 0.68 |
| 2,509.0 | 15.60 | 141.10 | 2,476.8 | -212.8 | 262.6 | 335.7 | 1.26 | 1.14 | -2.05 |
| 2,553.0 | 15.20 | 138.40 | 2,519.2 | -221.7 | 270.1 | 347.4 | 1.87 | -0.91 | -6.14 |
| 2,597.0 | 15.12 | 138.97 | 2,561.7 | -230.3 | 277.7 | 358.8 | 0.38 | -0.18 | 1.30 |
| 2,641.0 | 15.70 | 137.57 | 2,604.1 | -239.1 | 285.5 | 370.5 | 1.57 | 1.32 | -3.18 |
| 2,685.0 | 15.16 | 136.74 | 2,646.5 | -247.6 | 293.4 | 382.2 | 1.33 | -1.23 | -1.89 |
| 2,729.0 | 14.90 | 134.60 | 2,689.0 | -255.8 | 301.4 | 393.6 | 1.39 | -0.59 | -4.86 |
| 2,773.0 | 15.30 | 134.60 | 2,731.5 | -263.9 | 309.6 | 405.1 | 0.91 | 0.91 | 0.00 |
| 2,817.0 | 15.20 | 136.20 | 2,773.9 | -272.1 | 317.7 | 416.7 | 0.98 | -0.23 | 3.64 |
| 2,861.0 | 15.80 | 135.20 | 2,816.3 | -280.5 | 325.9 | 428.4 | 1.49 | 1.36 | -2.27 |
| 2,905.0 | 16.60 | 137.57 | 2,858.6 | -289.4 | 334.4 | 440.7 | 2.36 | 1.82 | 5.39 |
| 2,949.0 | 17.40 | 137.30 | 2,900.6 | -298.9 | 343.1 | 453.6 | 1.83 | 1.82 | -0.61 |
| 2,993.0 | 17.90 | 137.00 | 2,942.6 | -308.7 | 352.2 | 466.9 | 1.16 | 1.14 | -0.68 |



Survey Report

Company: NEWFIELD EXPLORATION

Project: USGS Myton SW (UT) SECTION 1 T 9S, R16E

Site: Well: S-1-9-16 Wellbore: Wellbore #1

Design: ACTUAL Local Co-ordinate Reference:

Well S-1-9-16

S-1-9-16 @ 5436.0ft (Newfield Rig #1) TVD Reference: S-1-9-16 @ 5436.0ft (Newfield Rig #1) MD Reference:

North Reference:

Survey Calculation Method: Minimum Curvature Database: EDM 2003.21 Single User Db

| Measured | | | Vertical | | | Vertical | Dogleg | Build | Turn |
|-------------|-------------|---------|-------------|----------|-----------------------|----------|-----------|------------------------|------------------------|
| Depth | Inclination | Azimuth | Depth | +N/-S | +E/-W | Section | Rate | Rate | Rate |
| (ft) | (°) | (°) | (ft) | (ft) | (ft) | (ft) | (°/100ft) | (°/100 ft) | (°/100 1t) |
| 3,037.0 | 17.80 | 137.20 | 2.984.5 | -318.5 | 361.3 | 480.4 | 0.27 | -0.23 | 0.45 |
| 3,081.0 | 18.40 | 137.43 | 3,026.3 | -328.6 | 370.6 | 494.0 | 1.37 | 1.36 | 0.52 |
| 3,126.0 | 19.00 | 139.90 | 3,068.9 | -339.4 | 380.1 | 508.4 | 2.21 | 1.33 | 5.49 |
| 3,170.0 | 17.80 | 139.80 | 3,110.7 | -350.0 | 389.1 | 522.3 | 2.73 | -2.73 | -0.23 |
| 3,214.0 | 16.90 | 138.80 | 3,152.6 | -360.0 | 397.6 | 535.4 | 2.15 | -2.05 | -2.27 |
| 3,258.0 | 17.60 | 137.00 | 3,194.7 | -369.7 | 406.4 | 548.4 | 2.00 | 1.59 | -4.09 |
| 3,302.0 | 18.50 | 137.50 | 3,236.5 | -379.7 | 415.6 | 562.0 | 2.08 | 2.05 | 1.14 |
| 3,346.0 | 19.40 | 138.30 | 3,278.1 | -390.3 | 425.2 | 576.3 | 2.13 | 2.05 | 1.82 |
| 3,390.0 | 19.34 | 137.30 | 3,319,6 | -401.1 | 435.0 | 590.9 | 0.77 | -0.14 | -2.27 |
| 3,434.0 | 19.20 | 134.90 | 3,361.2 | -411.5 | 445.1 | 605.4 | 1.83 | -0.32 | -5.45 |
| 3,478.0 | 19.60 | 136.30 | | | 455.1 | 620.0 | 1.39 | 0.91 | 3.18 |
| | | | 3,402.7 | -422.0 | | | | | |
| 3,522.0 | 19.86 | 137.13 | 3,444.1 | -432.8 | 465.5 | 634.9 | 0.87 | 0.59 | 1.89 |
| 3,566.0 | 19.40 | 137.10 | 3,485.5 | -443.6 | 475.5 | 649.7 | 1.05 | -1.05 | -0.07 |
| 3,610.0 | 18.70 | 136.70 | 3,527.1 | -454.1 | 485.4 | 664.0 | 1.62 | -1.59 | -0.91 |
| 3,654.0 | 18.50 | 135.90 | 3,568.8 | -464.3 | 495.1 | 678.1 | 0.74 | -0.45 | -1.82 |
| 3,698.0 | 18.10 | 135.80 | 3,610.6 | -474.2 | 504.7 | 691.9 | 0.91 | -0.91 | -0.23 |
| 3,742.0 | 17.60 | 137.50 | 3,652.5 | -484.0 | 513.9 | 705.4 | 1.64 | -1.14 | 3.86 |
| 3,786.0 | 17.40 | 139.90 | 3,694.4 | -493.9 | 522.7 | 718.6 | 1.70 | -0.45 | 5.45 |
| 3,830.0 | 16.61 | 139.32 | 3,736.5 | -503.7 | 531.0 | 731.4 | 1.84 | -1.80 | -1.32 |
| 3,874.0 | 15.80 | 137.90 | 3,778.8 | -512.9 | 539.1 | 743.7 | 2.05 | -1.84 | -3.23 |
| 3,918.0 | 15.50 | 137.20 | 3,821.1 | -521.7 | 547.1 | 755.5 | 0.81 | -0.68 | -1.59 |
| 3,962.0 | 15.70 | 137.80 | 3,863.5 | -530.4 | 555.1 | 767.4 | 0.58 | 0.45 | 1.36 |
| 4,006.0 | 15.90 | 139.90 | 3,905.9 | -539.4 | 563.0 | 779.3 | 1.38 | 0.45 | 4.77 |
| 4,050.0 | 15.90 | 141.00 | 3,948.2 | -548.7 | 570.7 | 791.3 | 0.68 | 0.00 | 2.50 |
| 4,094.0 | 15.50 | 141.90 | 3,990.5 | -558.0 | 578.1 | 803.2 | 1.06 | -0.91 | 2.05 |
| 4,138.0 | 15.60 | 142.60 | 4,032.9 | -567.4 | 585.3 | 814.9 | 0.48 | 0.23 | 1.59 |
| 4,183.0 | 15.40 | 143.50 | 4,076.3 | -577.0 | 592.6 | 826.8 | 0.70 | -0.44 | 2.00 |
| 4,103.0 | 14.50 | 143.10 | 4,070.3 | -586.1 | 599.3 | 838.1 | 2.06 | -2.05 | -0.91 |
| | | | | | | | | | -1.14 |
| 4,271.0 | 13.90 | 142.60 | 4,161.4 | -594.7 | 605.9 | 848.8 | 1.39 | -1.36 | |
| 4,315.0 | 12.90 | 144.70 | 4,204.2 | -602.9 | 611.9 | 858.9 | 2.53 | -2.27 | 4.77 |
| 4,359.0 | 13.00 | 145.10 | 4,247.1 | -611.0 | 617.6 | 868.6 | 0.31 | 0.23 | 0.91 |
| 4,403.0 | 13.00 | 145.10 | 4,290.0 | -619.1 | 623.2 | 878.4 | 0.00 | 0.00 | 0.00 |
| 4,447.0 | 12.30 | 142.80 | 4,332.9 | -626.9 | 628.9 | 887.9 | 1.96 | -1.59 | -5.23 |
| 4,491.0 | 11.90 | 141.40 | 4,376.0 | -634.1 | 634.6 | 897.1 | 1.13 | -0.91 | -3.18 |
| 4,535.0 | 11.60 | 139.50 | 4,419.0 | -641.1 | 640.3 | 906.0 | 1.11 | -0.68 | -4.32 |
| 4,579.0 | 11.40 | 140.60 | 4,462.2 | -647.8 | 645.9 | 914.7 | 0.67 | -0.45 | 2.50 |
| 4,623.0 | 12.00 | 140.50 | 4,505.2 | -654.7 | 651.6 | 923.6 | 1.36 | 1.36 | -0.23 |
| 4,667.0 | 13.00 | 143.00 | 4,548.2 | -662.2 | 657.5 | 933.1 | 2.58 | 2.27 | 5.68 |
| 4,711.0 | 12.60 | 142.70 | 4,591.1 | -669.9 | 663.3 | 942.8 | 0.92 | -0.91 | -0.68 |
| 4,755.0 | 13.00 | 142.30 | 4,634.0 | -677.7 | 669.3 | 952.4 | 0.93 | 0.91 | -0.91 |
| 4,799.0 | 13.40 | 141.10 | 4,676.8 | -685.5 | 675.5 | 962.4 | 1.10 | 0.91 | -2.73 |
| 4,843.0 | 13.10 | 140.90 | 4,719.7 | -693.4 | 681.9 | 972.5 | 0.69 | -0.68 | -0.45 |
| 4,887.0 | 13.30 | 142.50 | 4,762.5 | -701.3 🗲 | > 688.1 | 982.5 | 0.95 | 0.45 | 3.64 |
| 4,920.6 | 13.53 | 142.12 | 4,795.2 | -707.4 | 692.9 | 990.2 | 0.73 | 0.68 | -1.14 |
| S-1-9-16 TG | | | | | | | | | |
| 4,931.0 | 13.60 | 142.00 | 4,805.3 | -709.4 | 694.3 | 992.6 | 0.73 | 0.68 | -1.12 |
| 4,975.0 | 14.40 | 143.80 | 4,848.0 | -717.8 | 700.8 | 1,003.2 | 2.07 | 1.82 | 4.09 |
| 5,019.0 | 14.60 | 143.30 | 4,890.6 | -726.7 | 707.3 | 1,014.1 | 0.54 | 0.45 | -1.14 |
| 5,063.0 | 14.60 | 141.00 | 4,933.2 | -735.5 | 714.1 | 1,025.1 | 1.32 | 0.00 | -5.23 |
| 5,106.0 | 14.00 | 135.72 | 4,974.8 | -743.4 | 721.2 | 1,035.7 | 3.34 | -1.40 | -12.28 |
| 5,149.0 | 14.06 | 135.41 | 5,016.6 | -750.8 | 728.5 | 1,046.1 | 0.22 | 0.14 | -0.72 |
| | | | | | 735.9 | 1,046.1 | 0.22 | 0.09 | 3.16 |
| 5,193.0 | 14.10 | 136.80 | 5,059.2 | -758.6 | | | | | 1.14 |
| 5,237.0 | 14.20 | 137.30 | 5,101.9 | -766.4 | 743.2 | 1,067.6 | 0.36 | 0.23 | 1.14 |



Survey Report

Company:

NEWFIELD EXPLORATION

Project:

USGS Myton SW (UT)

Site:

SECTION 1 T 9S, R16E

Well:

S-1-9-16

Wellbore: Design: Wellbore #1 ACTUAL Local Co-ordinate Reference:

Well S-1-9-16

TVD Reference:

S-1-9-16 @ 5436.0ft (Newfield Rig #1)

MD Reference;

S-1-9-16 @ 5436.0ft (Newfield Rig #1) True

North Reference:

Survey Calculation Method:

Minimum Curvature

Database:

EDM 2003.21 Single User Db

| Measured | | | Vertical | | | Vertical | Dogleg | Build | Turn |
|----------|-------------|---------|----------|--------|-------|----------|------------------------|-----------|-----------|
| Depth | Inclination | Azimuth | Depth | +N/-S | +E/-W | Section | Rate | Rate | Rate |
| (ft) | (°) | (°) | (ft) | (ft) | (ft) | (ft) | (°/100 ft) | (°/100ft) | (°/100ft) |
| 5,325.0 | 13.60 | 138.00 | 5,187.3 | -782.1 | 757.3 | 1,088.7 | 0.72 | -0.68 | -0.91 |
| 5,367.0 | 14.20 | 140.30 | 5,228.1 | -789.8 | 763.9 | 1,098.8 | 1.94 | 1.43 | 5.48 |
| 5,411.0 | 14.00 | 140.30 | 5,270.8 | -798.0 | 770.8 | 1,109.5 | 0.45 | -0.45 | 0.00 |
| 5,455.0 | 13.10 | 141.00 | 5,313.5 | -806.0 | 777.3 | 1,119.7 | 2.08 | -2.05 | 1.59 |
| 5,499.0 | 12.70 | 138.50 | 5,356.4 | -813.5 | 783.7 | 1,129.5 | 1.56 | -0.91 | -5.68 |
| 5,544.0 | 13.40 | 135.30 | 5,400.3 | -820.9 | 790.6 | 1,139.7 | 2.24 | 1.56 | -7.11 |
| 5,588.0 | 14.10 | 134.80 | 5,443.0 | -828.3 | 798.0 | 1,150.1 | 1.61 | 1.59 | -1.14 |
| 5,632.0 | 14.30 | 135.20 | 5,485.7 | -835.9 | 805.6 | 1,160.9 | 0.51 | 0.45 | 0.91 |
| 5,678.0 | 13.90 | 137.70 | 5,530.3 | -844.1 | 813.4 | 1,172.1 | 1.58 | -0.87 | 5.43 |
| 5,722.0 | 14.20 | 135.90 | 5,573.0 | -851.8 | 820.7 | 1,182.8 | 1.20 | 0.68 | -4.09 |
| 5,766.0 | 15.67 | 136.80 | 5,615.5 | -860.0 | 828.5 | 1,194.1 | 3.38 | 3.34 | 2.05 |
| 5,810.0 | 16.30 | 138.00 | 5,657.8 | -869.0 | 836.7 | 1,206.3 | 1.62 | 1.43 | 2.73 |
| 5,854.0 | 15.80 | 139.90 | 5,700.1 | -878.1 | 844.7 | 1,218.4 | 1.65 | -1.14 | 4.32 |
| 5,898.0 | 15.90 | 141.80 | 5,742.4 | -887.5 | 852.3 | 1,230.4 | 1.20 | 0.23 | 4.32 |
| 5,942.0 | 15.60 | 143.60 | 5,784.7 | -897.0 | 859.5 | 1,242.2 | 1.30 | -0.68 | 4.09 |
| 5,986.0 | 14.70 | 143.60 | 5,827.2 | -906.2 | 866.3 | 1,253.6 | 2.05 | -2.05 | 0.00 |
| 6,032.0 | 13.70 | 142.40 | 5,871.8 | -915.2 | 873.1 | 1,264.8 | 2.27 | -2.17 | -2.61 |
| 6,076.0 | 12.80 | 143.80 | 5,914.6 | -923.3 | 879.2 | 1,274.8 | 2.17 | -2.05 | 3.18 |
| 6,119.0 | 11.70 | 142.40 | 5,956.7 | -930.6 | 884.6 | 1,283.8 | 2.65 | -2.56 | -3.26 |
| 6,163.0 | 10.60 | 142.20 | 5,999.8 | -937.3 | 889.8 | 1,292.3 | 2.50 | -2.50 | -0.45 |
| 6,208.0 | 9.50 | 143.00 | 6,044.1 | -943.6 | 894.6 | 1,300.1 | 2.46 | -2.44 | 1.78 |
| 6,252.0 | 8.70 | 144.10 | 6,087.6 | -949.1 | 898.8 | 1,307.0 | 1.86 | -1.82 | 2.50 |

| | Checked By: | Approved By: | Date | |
|--|-------------|--------------|------|--|
|--|-------------|--------------|------|--|



Project: USGS Myton SW (UT)

Site: SECTION 1 T 9S, R16E

Well: S-1-9-16 Wellbore: Wellbore #1 SURVEY: ACTUAL

FINAL SURVEY REPORT




Azimuths to True North Magnetic North: 11.40°


Magnetic Field Strength: 52344.4snT Dip Angle: 65.82° Date: 10/12/2010 Model: IGRF2010

Date: 17:53, October 06 2011

THIS SURVEY IS CORRECT TO THE BEST OF MY KNOWLEDGE

AND IS SUPPORTED BY ACTUAL FIELD DATA.

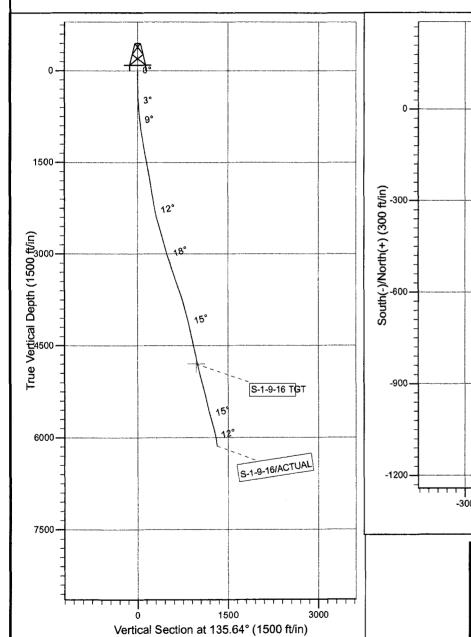

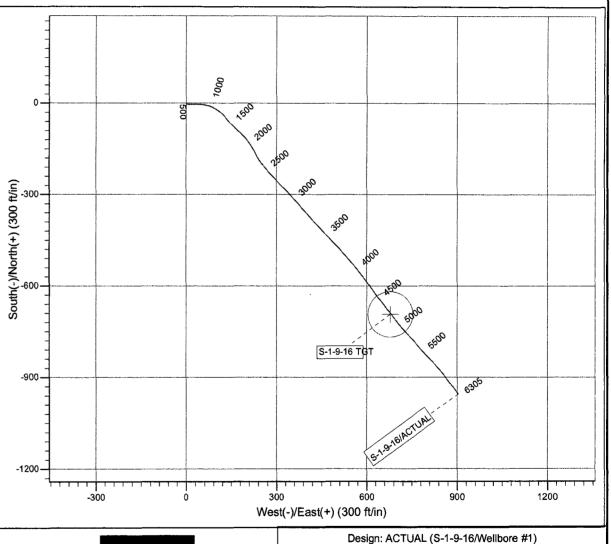

Created By: Jim hudson

Daily Activity Report

Format For Sundry GMBU S-1-9-16 6/1/2011 To 10/30/2011

GMBU S-1-9-16

Waiting on Cement

Date: 8/26/2011

Ross #29 at 310. Days Since Spud - On 8/24/11 @ 9:00 AM Ross Spud rig # 29 Spud the GMB S-1-9-16 /Drill 310' of 12 1/4" hole./PU & run - Cmt. Returned to pit. - On 8/26/11 Baker Hughes cemented Csg. With 160 sks Class G Cmt.+ 2% CACL+.25 #/sk Cello Flake/5 bbls - 7 its of 8 5/8" J55 24# ST&C Csg /Set @ 310.82' KB

Daily Cost: \$0

Cumulative Cost: \$52,531

GMBU S-1-9-16

Waiting on Cement

Date: 9/21/2011

NDSI #1 at 310. 0 Days Since Spud - Rig down Prepair for move

Daily Cost: \$0

Cumulative Cost: \$56,055

GMBU S-1-9-16

Drill 7 7/8" hole with fresh water

Date: 9/22/2011

NDSI #1 at 2649. 1 Days Since Spud - Rig up B&C Quick Test and test Pipe, and Blind Rams, Choke, Upper Kelly, Floor Valve to 2,000PSI - Move Rig F/ the L-1-9-16 to the S-1-9-16 - F/ 10min. Test 8 5/8" Surface Casing to 1,500PSI F/ 30min all tested good - Drill 7 7/8" hole F/ 260' to 2209' W/ 20,000 WOB, 151RPM, 390GPM, 183fph ROP - Index Sub, NMDC, 26HWDP - Drill 7 7/8" hole F/ 260' to 2209' W/ 20,000 WOB, 151RPM, 390GPM, 183fph ROP - Replace PTO on C-15 Floor Motor - Pick up BHA as follows. Smith MI616 PDC Bit, 7/8mil 4.8stg .33rev 1.5° Mud Motor, NMDC, Gap Sub,

Daily Cost: \$0

Cumulative Cost: \$108,989

GMBU S-1-9-16

Drill 7 7/8" hole with fresh water

Date: 9/23/2011

NDSI SS #1 at 4980. 2 Days Since Spud - Rig service, function test BOP and Crownomatic - Drill 7 7/8" hole F/ 3440' to 4980' w/ 20K WOB,TRPM-165,GPM-390,Avg ROP-91 ft/hr - No H2S or flow reported in last 24 hours - Drill 7 7/8" hole F/ 2649' to 3440' w/ 20K WOB,TRPM-165,GPM-390,Avg ROP-122 ft/hr

Daily Cost: \$0

Cumulative Cost: \$130,708

GMBU S-1-9-16

Lay Down Drill Pipe/BHA

Date: 9/24/2011

NDSI SS #1 at 6305. 3 Days Since Spud - Lay down drill pipe - Circulate and condition hole Check flow= No flow - Drill 7 7/8" hole F/ 5420' to 6305' w/ 22K WOB,TRPM-165,GPM-390,Avg ROP-77 ft/hr - Rig Service, function test crownomatic and BOP - Drill 7 7/8" hole F/ 4980' to 5420' w/ 20K WOB,TRPM-165,GPM-390,Avg ROP-52 ft/hr - NO H2S or flow reported in last 24 hours

Daily Cost: \$0

Cumulative Cost: \$166,750

GMBU S-1-9-16

Wait on Completion

Date: 9/25/2011

NDSI SS #1 at 6305. 4 Days Since Spud - Clean mud tanks - fresh water, returned 19 bbls to pit, bump plug to 2569 psi, BLM and State were notified via email - of tail @ 14.4ppg and 1.24 yield (50:50:2+.05#SF+3%KCL+.25#CF+.5%EC-1) displaced w/ 148.7 bbls of - Cement w/ 230sks of lead @ 11ppg and 3.53 yield (PL II+.05#SF+3%KCL+.5#CF+2#Kol seal) and 450 sks - Circulate casing, hold safety meeting w/ BJ and rig up BJ - Release rig @ 5:00 Am on 9-25-11 - Change rams to 5.5", R/U B&C Quicktest and test to 2000#/10 min - R/U PSI and Log f/ 6306' to surface (dual guard, compensated density, neutron) - Lay down drill pipe and BHA, directional tools - Work on brakes , replaced all theard bolts - Lay down drill pipe - R/U and run 149 jts of 5.5",J-55,15.5#LTC set @ 6292.45',short jt.3560.75,float 6246.84

Finalized

Daily Cost: \$0

Cumulative Cost: \$315,725

Pertinent Files: Go to File List